


Dimensions

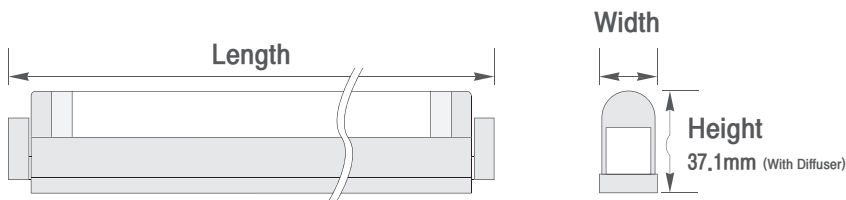


Model No.	Lamp power (Watt)	Length (mm)	Width (mm)	Height (mm)
DSL14A4B23NN/T	14W	595	24.2	35.6
DSL21A4B23NN/T	21W	895	24.2	35.6
DSL28A4B23NN/T	28W	1195	24.2	35.6
DSL35A4B23NN/T	35W	1495	24.2	35.6

Specification


Frequency range	50/60Hz
Voltage	100-130V/220-240V
Power factor	>97%(max.intensity) >70%(min.intensity)
Operation temperature	10-45 °
Class of protection	II
Diameter	16mm (T5)
Degree of protection	IP20



Mounting

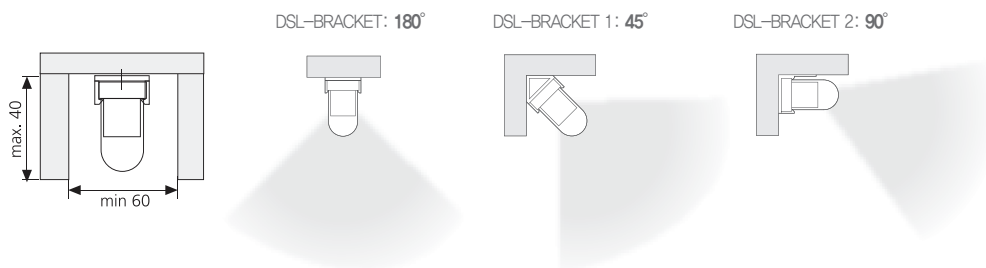

Connection

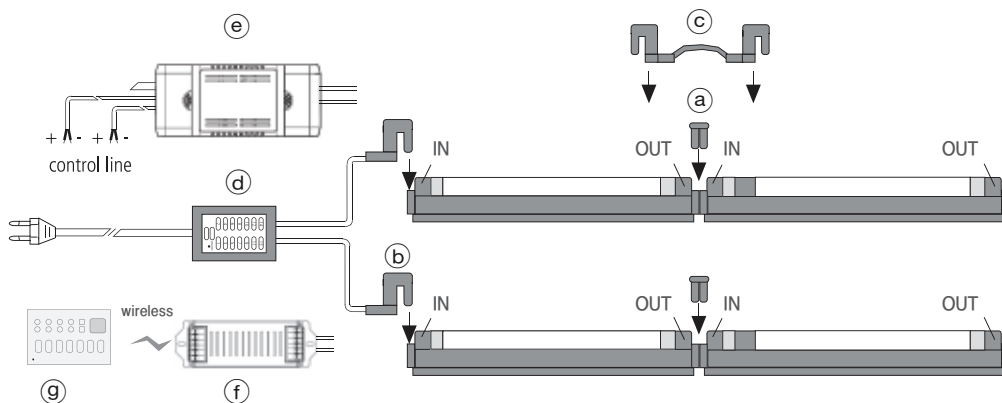

Accessories

- a** DSLCAP/T direct connecting cap
- b** DSLOPC230/T powercord 1800mm (6 feet) for TC-S1 or TC-S2
- c**
 - DLPTC/T connecting cable 150mm (6inch)
 - DLPTC1/T connecting cable 300mm (1 feet)
 - DLPTC2/T connecting cable 600mm (2 feet)
 - DLPTC4/T connecting cable 1200mm (4 feet)
 - DLPTC6/T connecting cable 1800mm (6 feet)
- d**
 - TC-S1 control brightness only
 - TC-S2 control brightness & kelvin
- e** DA02V10 0-10V/1-10V TO PWM translator
- f** DA02Z decoder
- g** FLS-2 wireless control