SlimLamp

T5 lighting fixture

FEELUX

Dimensions

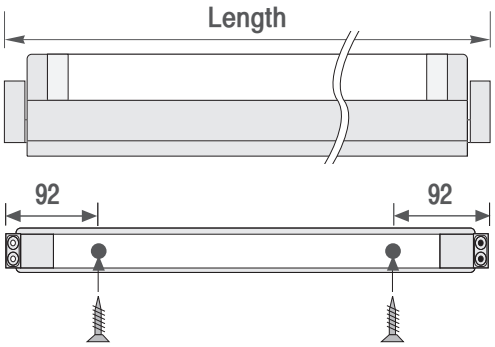



Model No.	Lamp power (Watt)	Length (mm)	lm	Input Current (mA)
SL8AB23NN/T	8W	345	740	50
SL14AB23NN/T	14W	595	1350	74
SL21AB23NN/T	21W	895	2100	107
SL28AB23NN/T	28W	1195	2900	140
SL35AB23NN/T	35W	1495	3650	174

Mounting

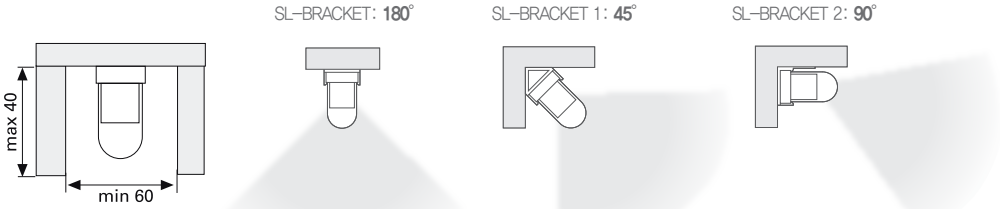

Connection (Total lamp output in one strip light maximum 400W)

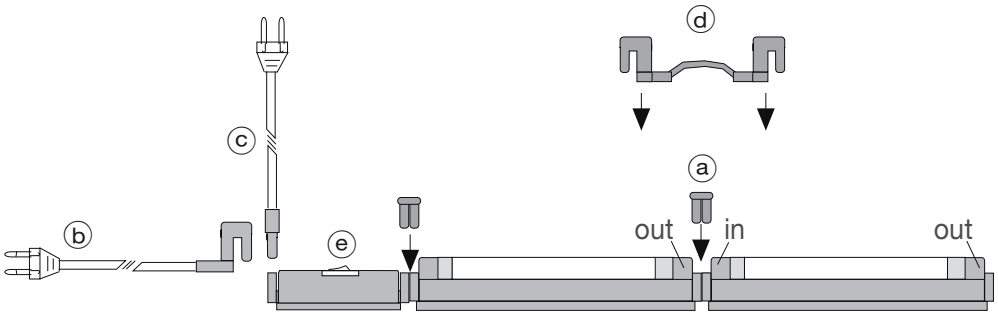



Specification

Frequency range	50/60Hz
Voltage	220-240V
Power factor	〉97%
Color rendering	〉82
Lamp life	16,000 hr
Diameter	16mm (T5)

Accessories

ⓐ DLCPL/T
direct connecting cap

ⓑ DLPC230/T
powercord 1800mm (6 feet) with plug

ⓒ DLPC230/SM2/T
powercord 1800mm (6 feet) with plug
& straight connector

ⓓ DLPTC/T
connecting cable 150mm (6 inch)
DLPTC1/T
connecting cable 300mm (1 feet)
DLPTC2/T
connecting cable 600mm (2 feet)
DLPTC4/T
connecting cable 1200mm (4 feet)
DLPTC6/T
connecting cable 1800mm (6 feet)

ⓔ DLSB/T
on-off switch

ⓕ SL8CV
polycarbonate diffuser for 8W Slimlamp
SL14CV
polycarbonate diffuser for 14W Slimlamp
SL21CV
polycarbonate diffuser for 21W Slimlamp
SL28CV
polycarbonate diffuser for 28W Slimlamp
SL35CV
polycarbonate diffuser for 35W Slimlamp