


INSTALLATION INSTRUCTION


- 1.The fixture is for MR-11 and GU-11.
- 2.Before installation, make sure that the power supply is off.
- 3.Follow the steps as down below for installation or replacement of bulb.
- 4.After finishing every step, tighten the screws, have the fixture fixed, then connect the power supply.
- 5.It is recommended that these products are installed by a qualified electrician.
- 6.Note only fix fixing arm when the lagging is above the fitting, it must be extended to its maximum height.
- 7.Ensure the fitting body is fixed to the frame using the alan keys provided.

Assembling diagram:


A

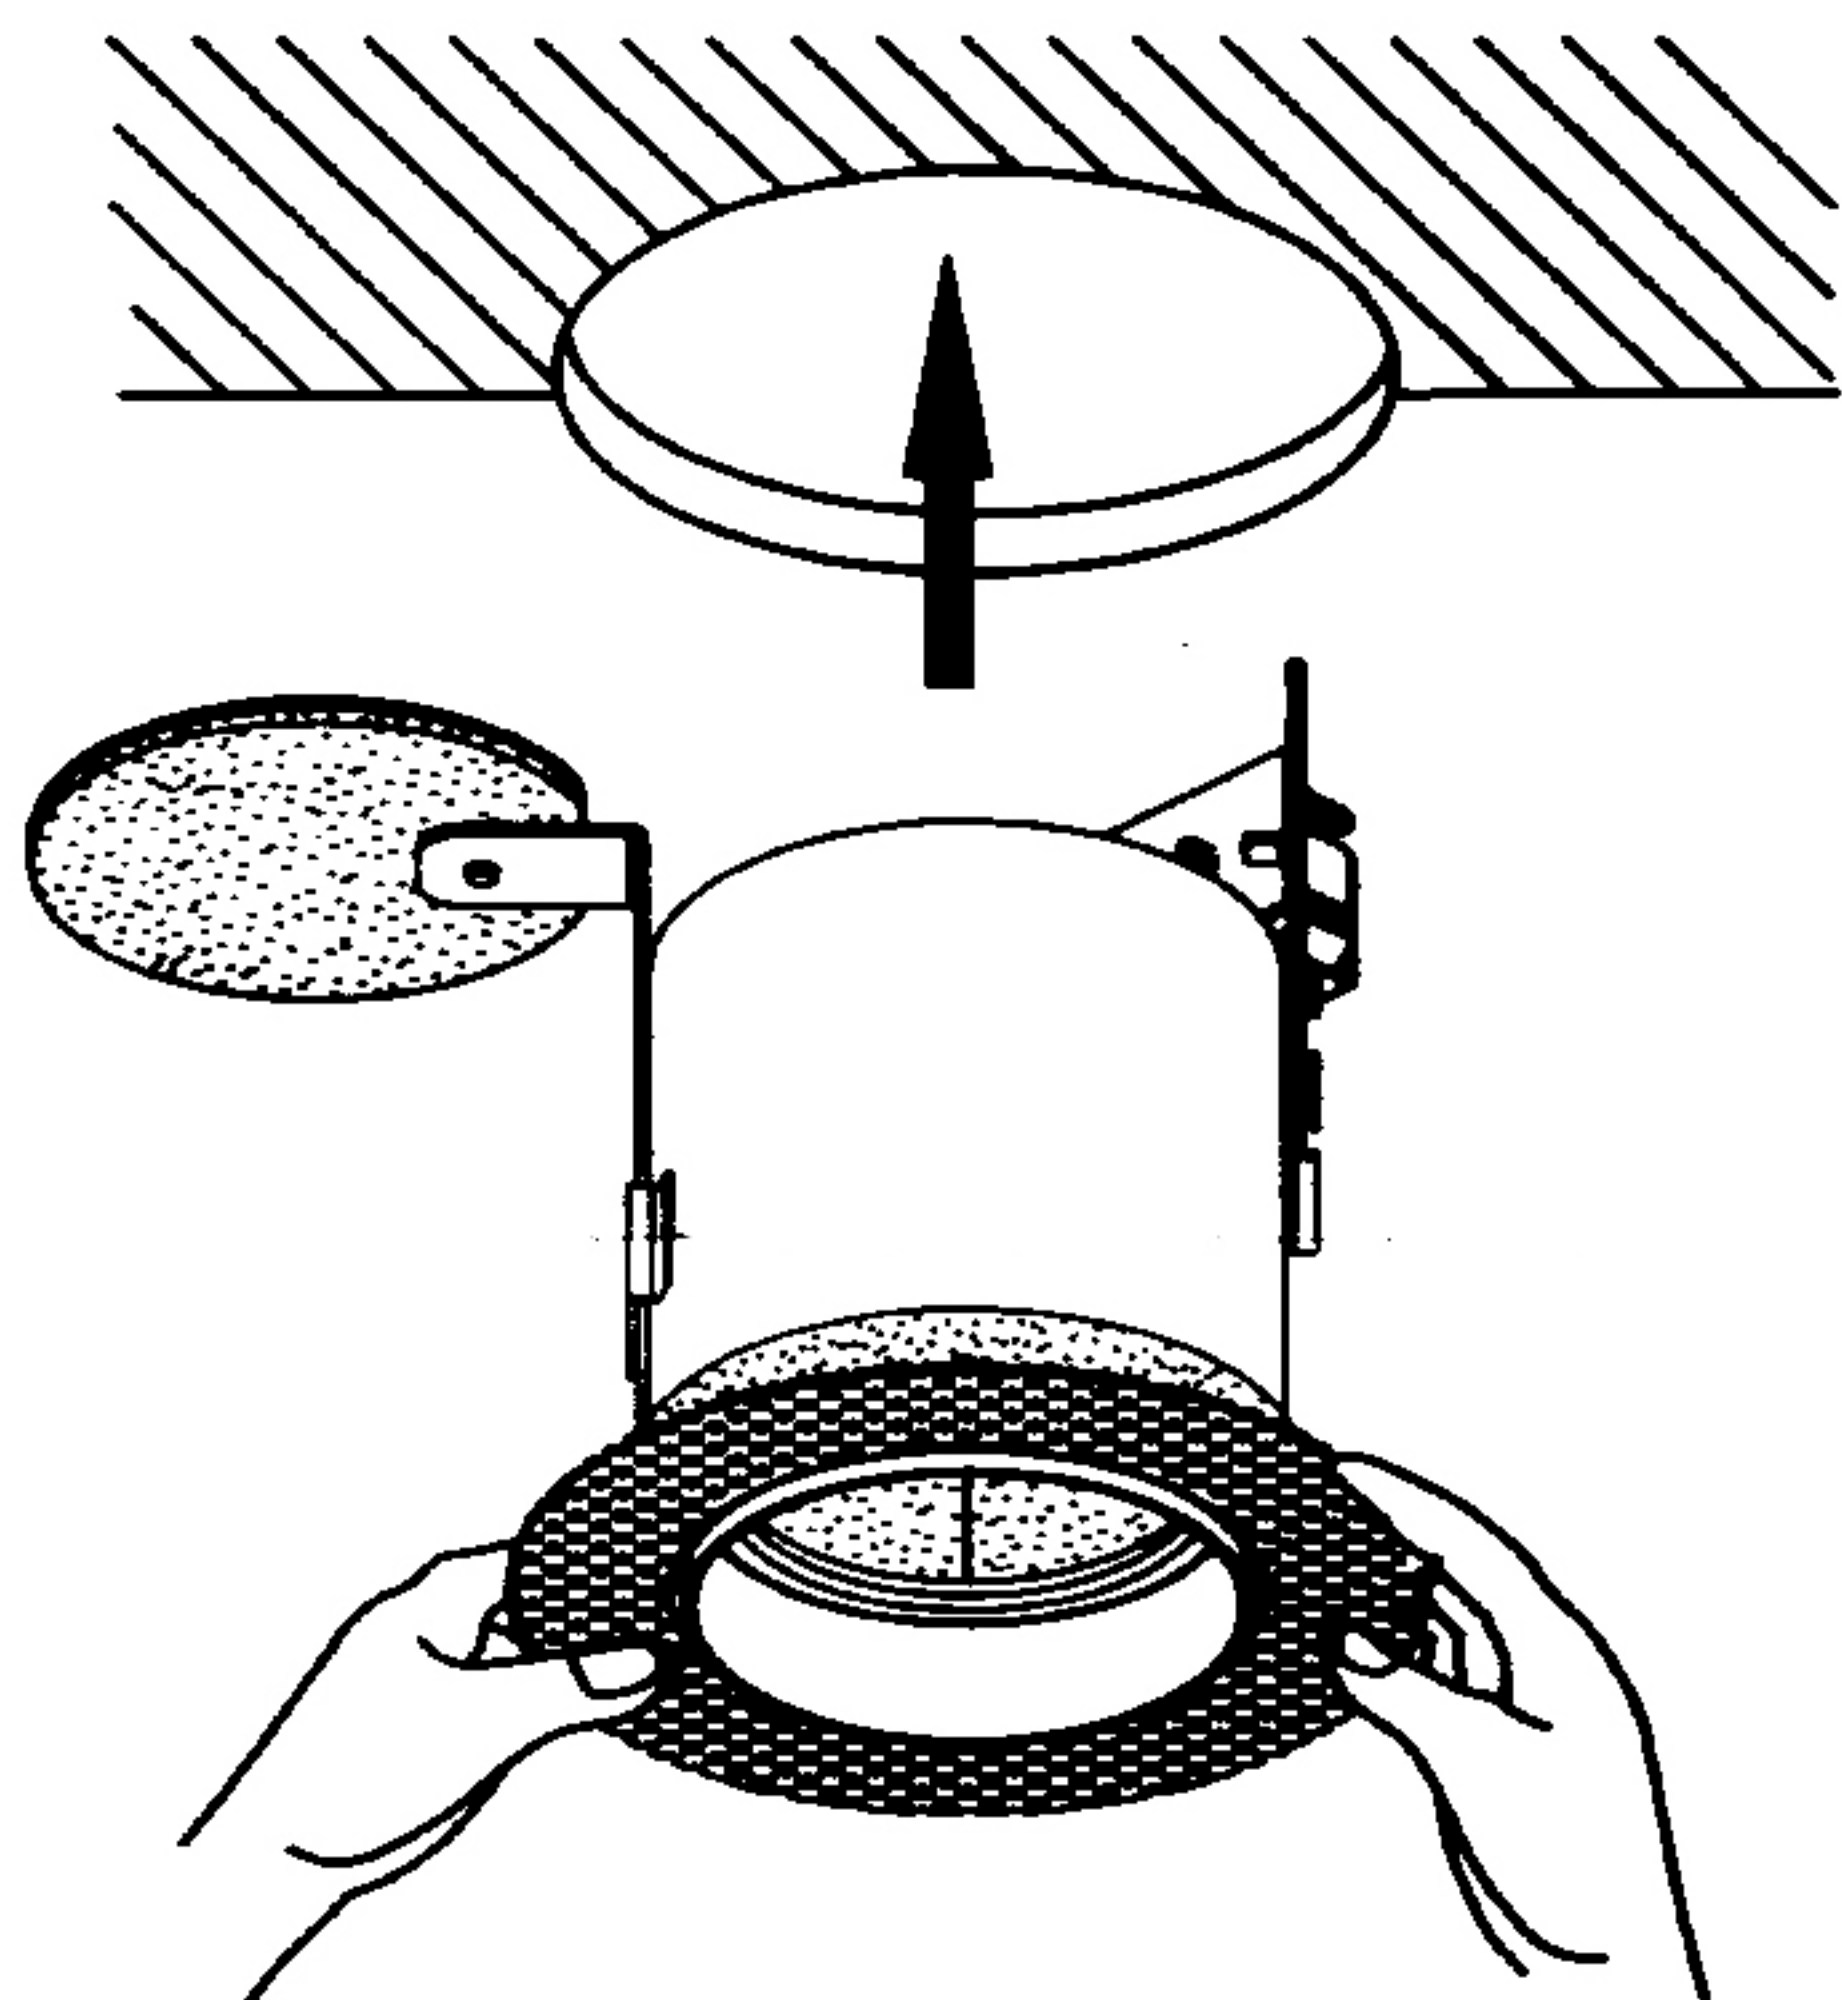


C

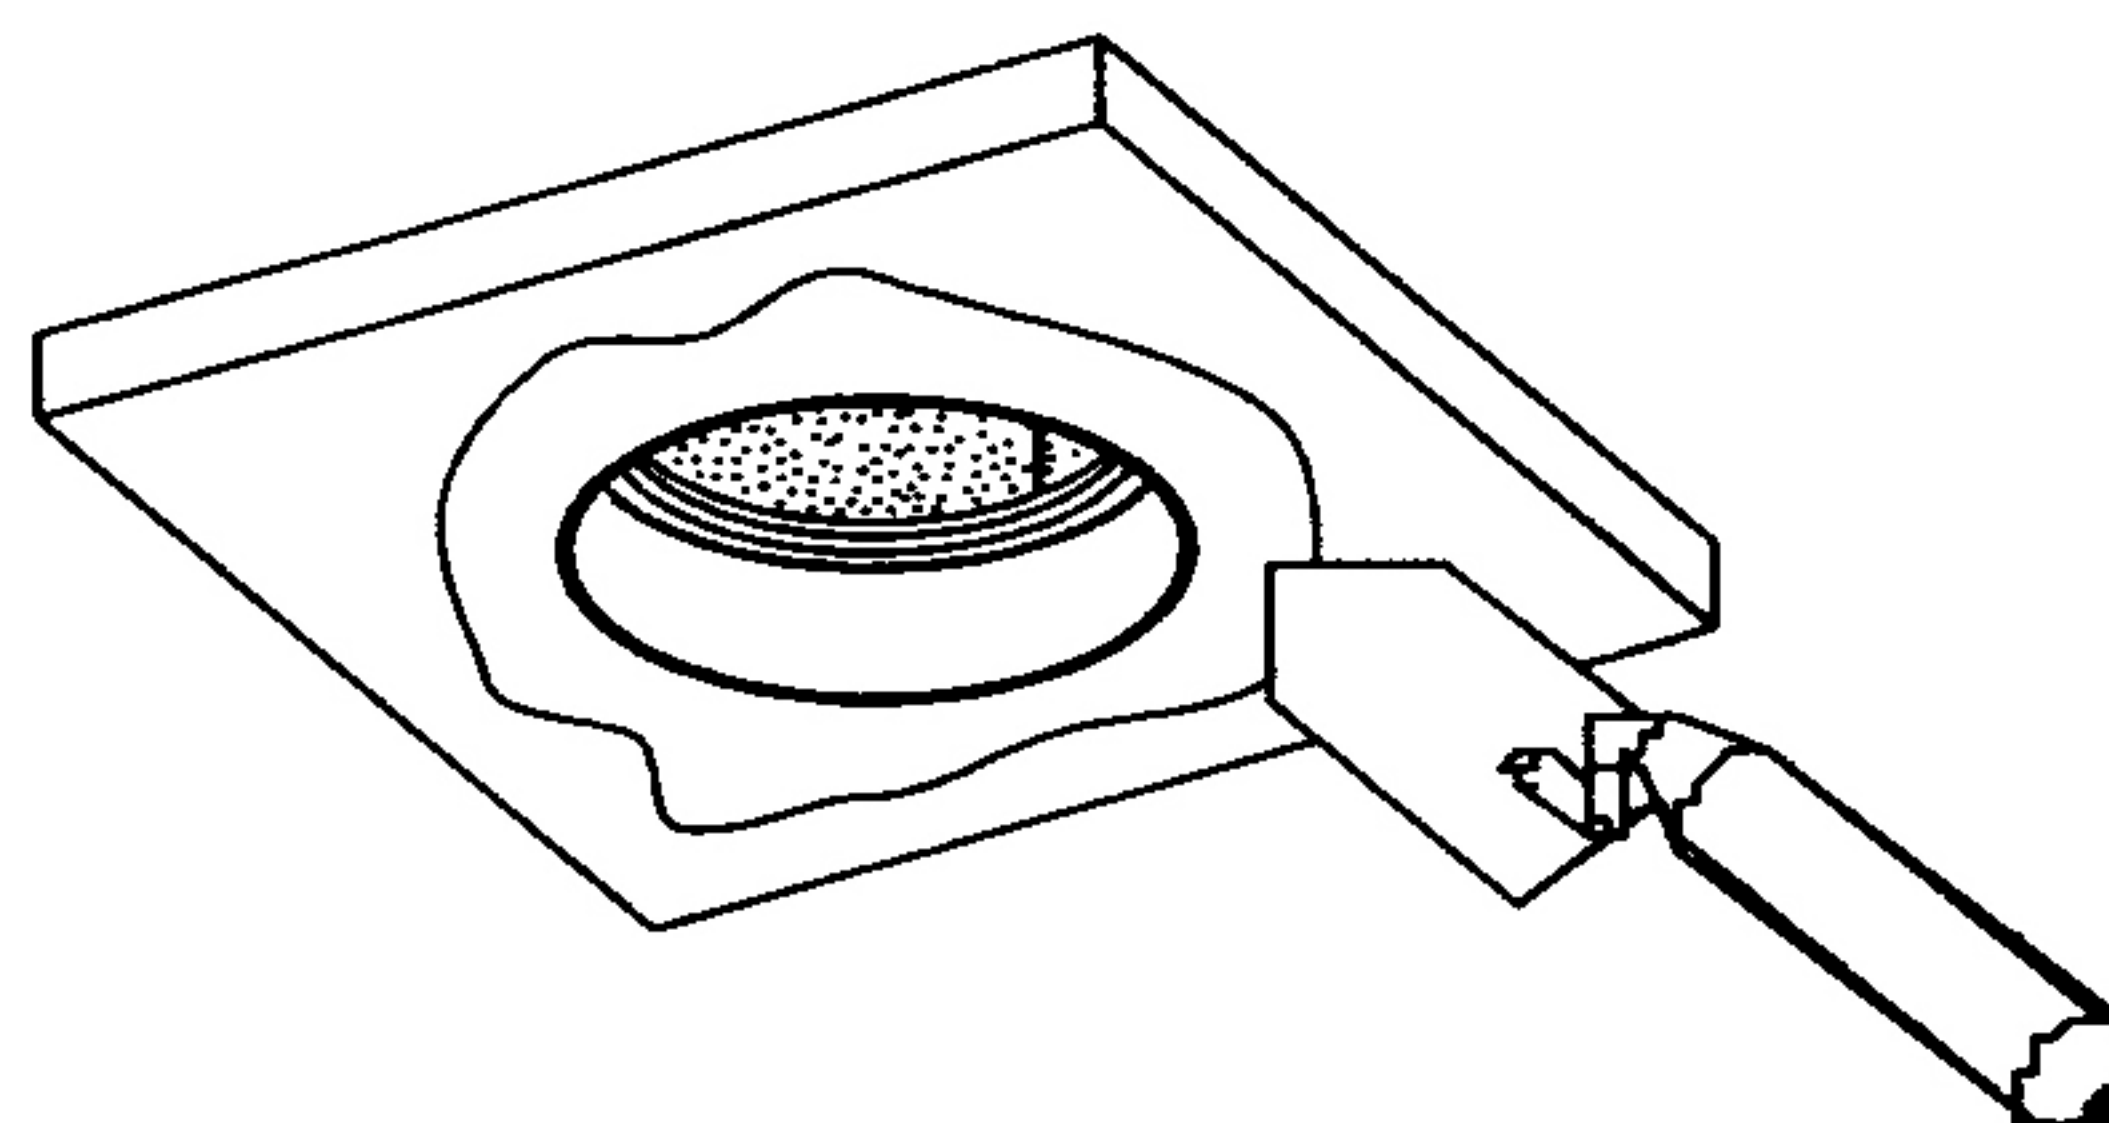


B

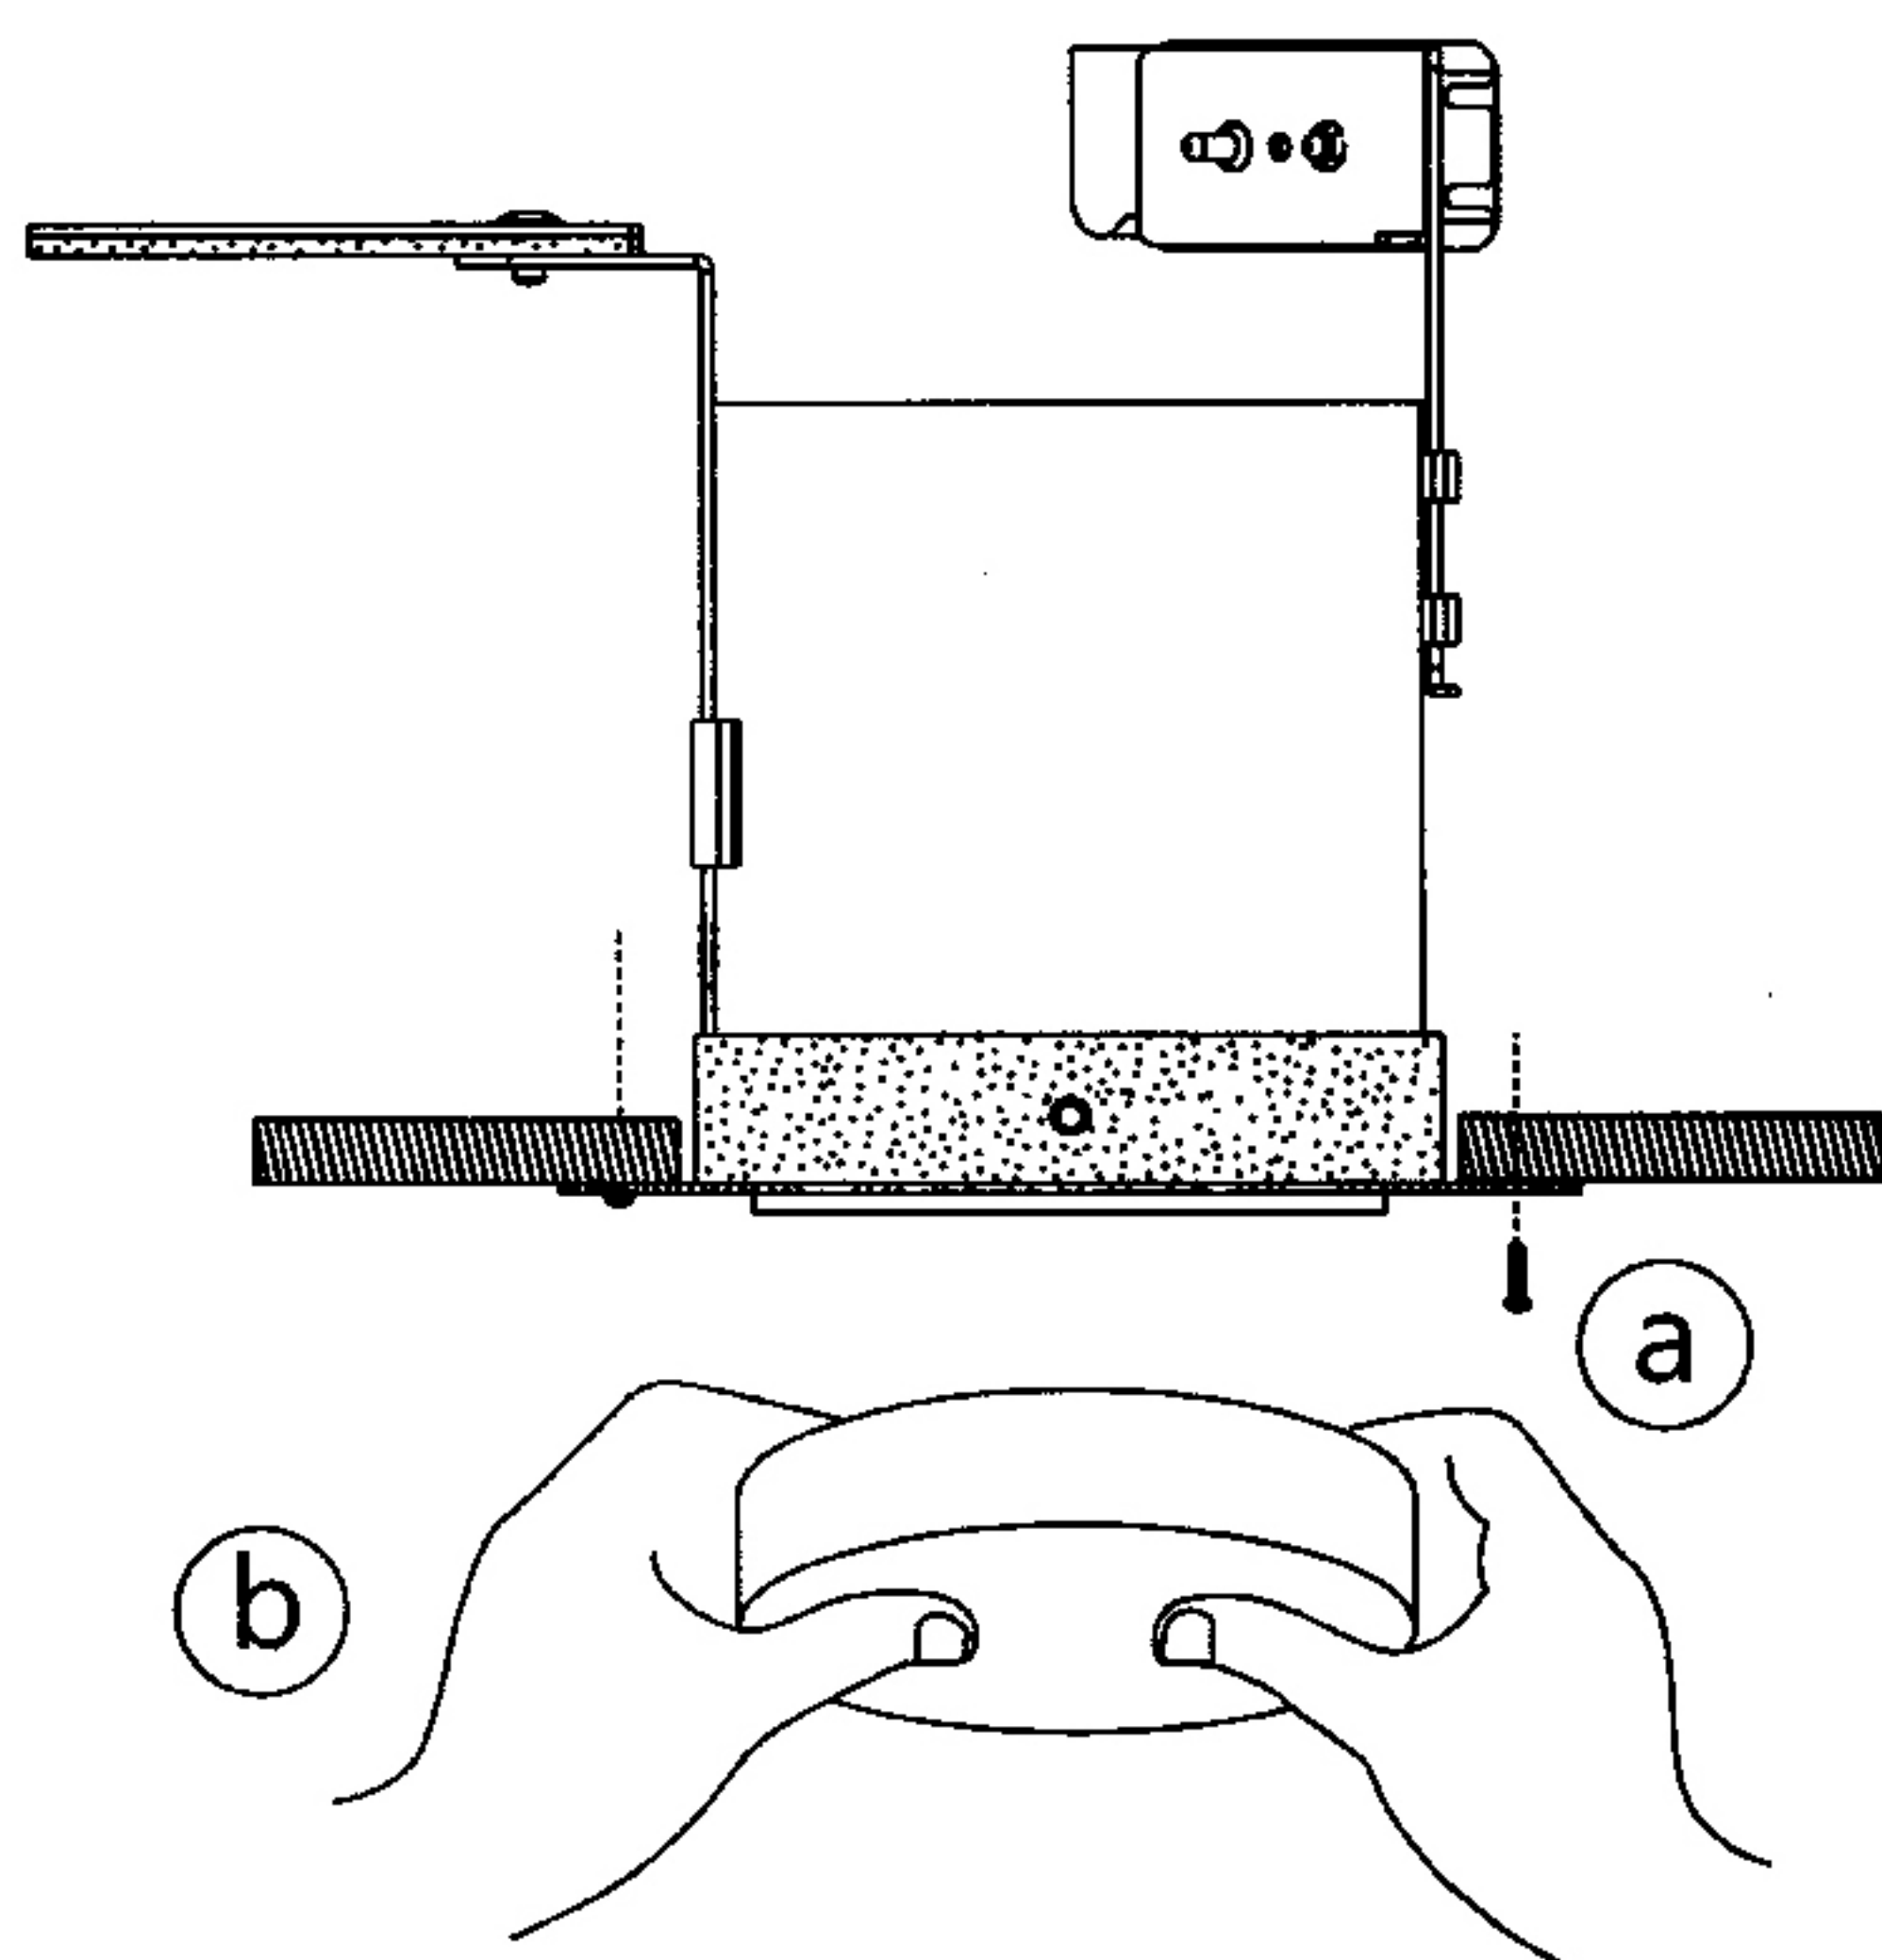


D

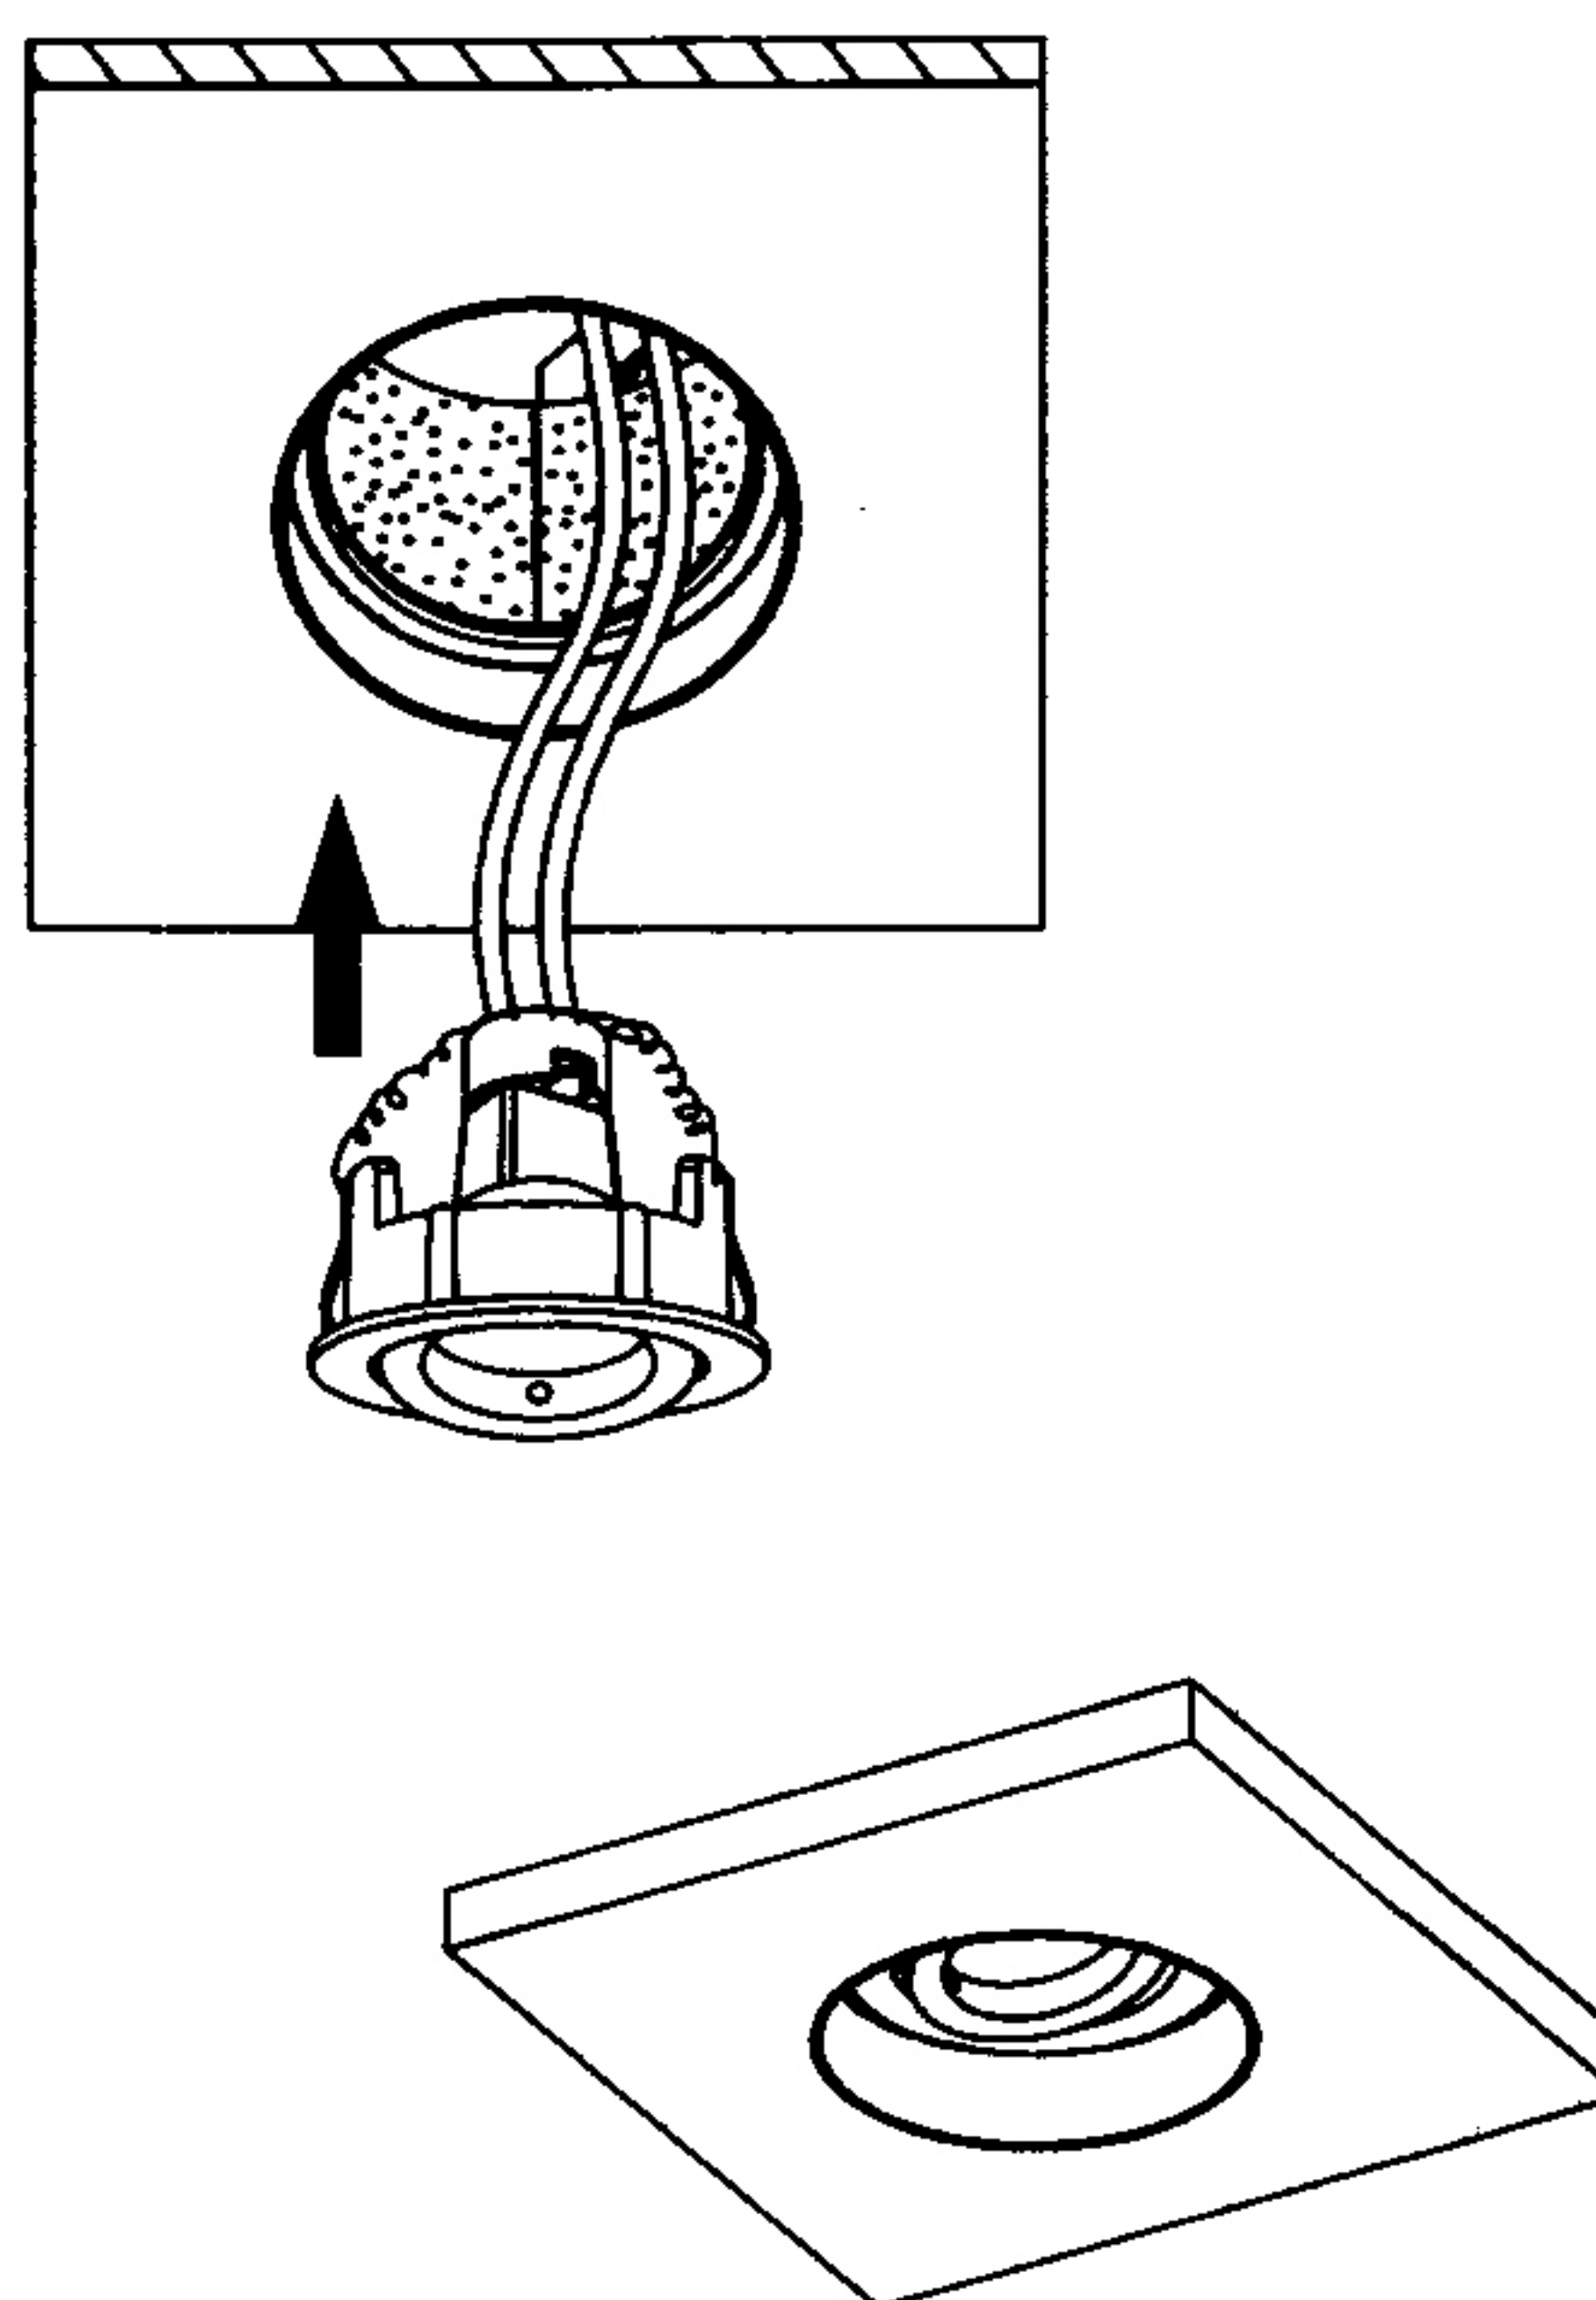


WARNING: POLYSTYRENE MUST BE FITTED
INSIDE THE FITTING BEFORE PLASTERING
TO AVOID ANY DAMAGES TO THE INNER RING.

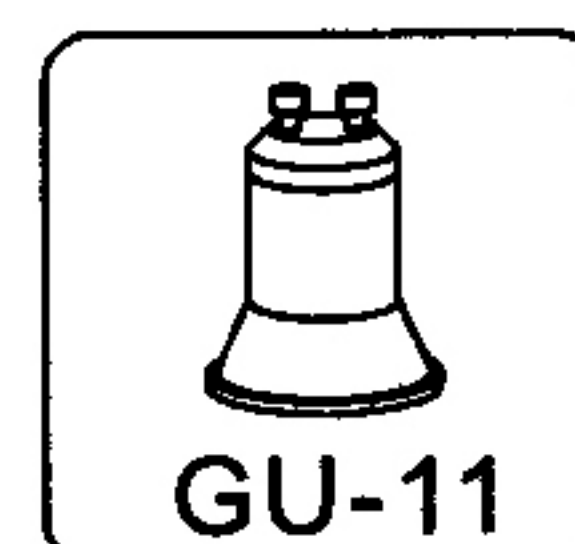

GU-11

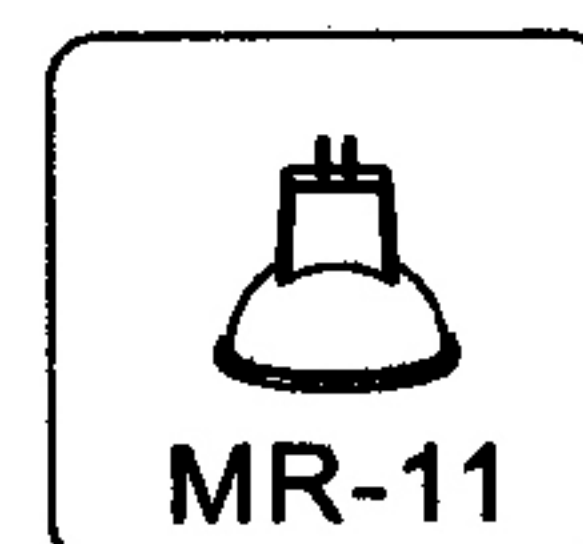

MR-11

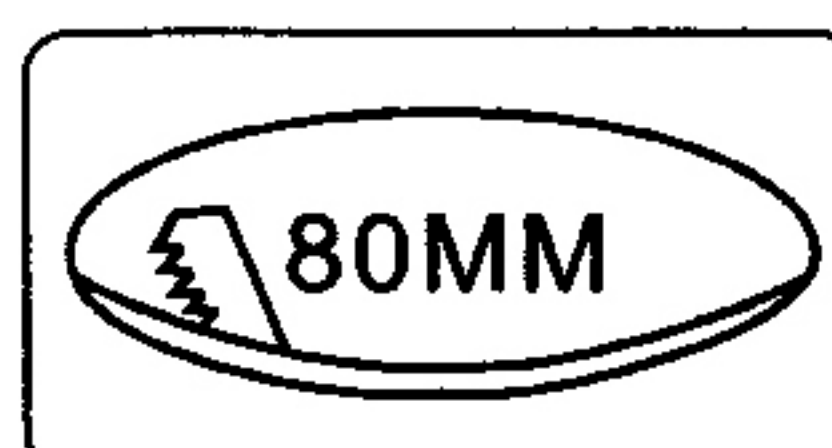

IP20



Only fix fixing arm when the lagging is above the fitting. It must be extended to it's maximum height.

