



## WISESCENE V2RECC

240V 4x500W  
Quicklink: Q462C

### General

IP Rating	IP56
Maximum Scenes Per Receiver	256
Maximum Switches Per Receiver	64
Minimum Spacing Between Receivers	200mm
Radio Frequency	868.3 MHz
Range for Metal Switch	50m Max Line Of Sight
Range for Plastic Switch	100m Max Line Of Sight

### Dimensions

Height	95mm
Length	250mm
Width	255mm

### Electrical

Maximum Wattage	Each channel 500W (R) - 500VA (L,C) - 100W (LED)
Minimum Wattage	Each channel 25W (R) - 25VA (L,C) - 7W (LED)
Voltage	240V AC


The **Wise Scene Box** is a 4 circuit dimmer that is controlled using wireless keypads. This box has been designed to dim incandescent, halogen and LEDs with smooth dimming and no flicker. You can set the individual circuits to switch or dim.

The **Wise Scene Box** is easy to install with simple mounting to any wall. The wiring is fast with large input terminals and a dedicated terminal for each circuit. The box is IP56 waterproof rated for inside the home or outside in the garden. Multiple boxes can be installed in the same home/garden to create a complete system for controlling your lighting.

The **Wise Scene Box** has many programming options giving you huge flexibility. You can choose single buttons for on/off and dimming to full scene setting using the wireless keypads plus many more options. Multiple keypads can be used to control the lights from different positions.

We have implemented a very straight forward way of changing the pre-set scenes. No software is required. This gives either the electrician or home owner the option to adjust their own scenes to their preference without the need of a programmer. All options can be controlled on your phone, tablet or PC.

## Wise Scene Box Scene Setting

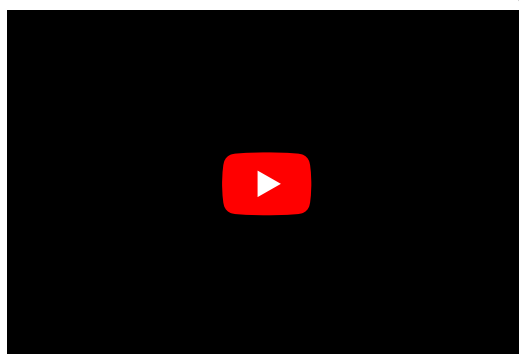

## WiseScene Box Programming Tutorial

# Dimming and Scene

Wise Scene Box Receiver Clear Lid  
240V 4x500W



**MR. RESISTOR**<sup>®</sup>  
Lighting Specialist Est. 1968

---

