
Rigel Trimless

Rigel 40 Trimless Fire-Rated Adjustable 883lm Downlight

7W 3000K Warm White 36° White



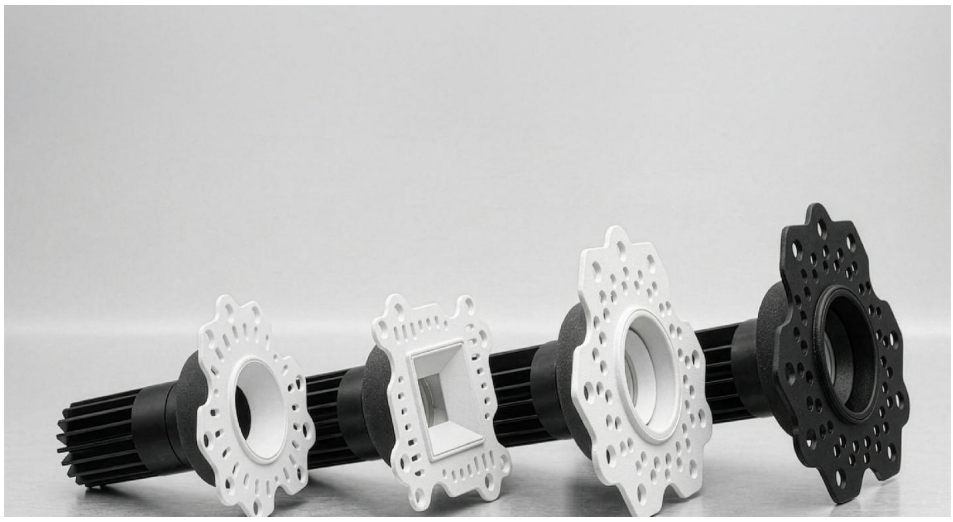

RIGEL40 RD A 36D73K

7W 3000K Warm White 36° White
Quicklink: Q6E67

General

Colour	White
Construction	Aluminium
Dimmable	Yes
IP Rating	IP44

Dimensions

Cut Out	62mm (Diameter)
Diameter	42mm
Height	73mm
Minimum Ceiling Depth	69mm
Vertical Rotation	30°

Electrical

Maximum Wattage	7W

Light Characteristics

Beam Angle	36°
Colour Rendering Index	90
Colour Temperature	3000K Warm White
Lumens	883 lm
Lumens Per Watt	126 lm/W

Rigel Downlight Configurator

Configure your Rigel downlight step by step, with full flexibility to customise it to your needs.

The **Rigel 40 Adjustable** is a miniature, fire-rated downlight designed for precise, directional lighting in a compact, unobtrusive form. Despite its exceptionally small size, it delivers a powerful lumen output with CRI 90+ for outstanding colour accuracy and clarity.


Its smooth adjustable tilt makes it ideal for highlighting walls, artwork, niches or architectural features, providing subtle yet effective accent lighting for premium residential and commercial interiors.

Built around a miniature integrated LED module, it requires no lamp replacement and ensures long-life, consistent performance. The plaster-in housing allows the downlight to sit perfectly flush within the ceiling, creating a seamless, minimalist finish that blends effortlessly into the surrounding architecture. Its advanced anti-glare optical design ensures comfortable, controlled illumination, while the compact and smart plug and play construction makes installation straightforward.

The Rigel Trimless downlights can be connected together using their outer grid design, making it easy to line them up exactly how you want. You can keep it simple with a double downlight, run them in a straight line, or get more creative with shapes like circles. The connected grids help everything stay neat and evenly spaced, without hassle.

Please note: This fitting requires a separate driver, available in the Linked Items section. Ensure the driver is set to 200 mA or below. When using a TRIAC driver, set it to 180 mA.

RIGEL 40 Adjustable with 7W Module

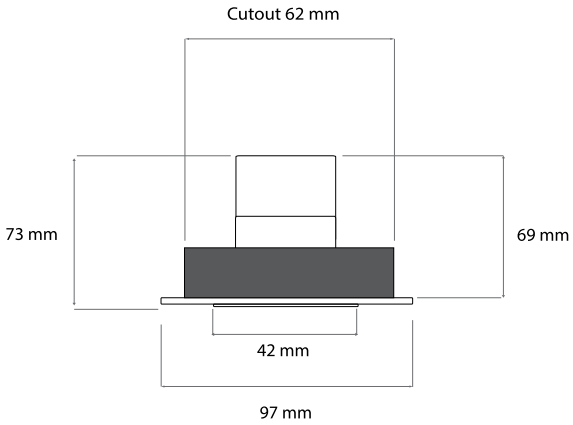

RIGEL 40 Adjustable with 7W Module

