


# Wireless ID Switches

## Wise ID Switch

Polished Brass 3 Channel

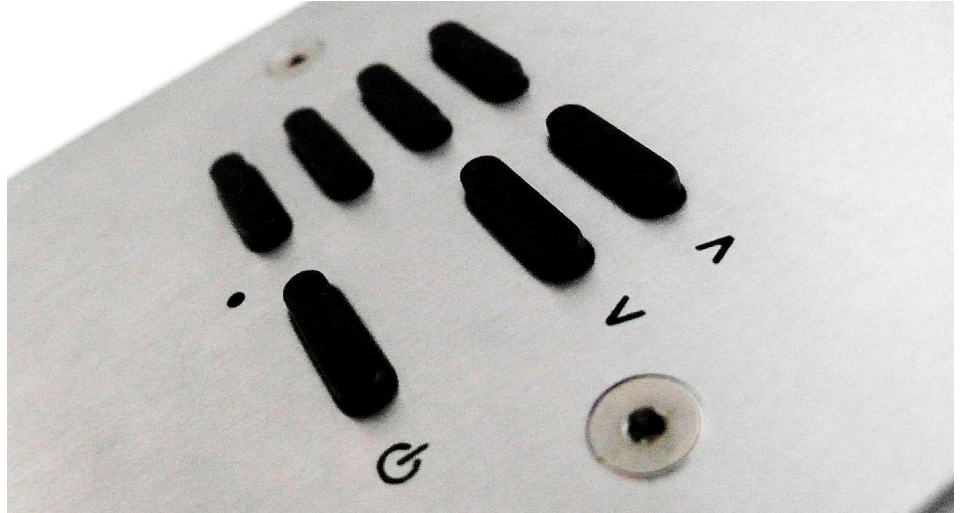

### WISEIDDSW3 PB

Polished Brass 3 Channel

Quicklink: Q1C96

#### General

Colour	Polished Brass
Construction	Steel
IP Rating	IP20

Operating Temperature	-10°C ~ +55°C
Radio Frequency	868.3 MHz

#### Dimensions

Depth	20mm
Height	86mm
Plate Depth	1.55mm
Width	86mm

#### Electrical

Replacement Battery	CR2430
Voltage	3V

The 1, 2 and 4 channel **Wise ID Switches** can be programmed to any of the channels on the **Wise receivers**. You can add up to 32 switches to the **Wise receivers**. This means there is no need for two way wiring as you can add another radio switch and place it where you like. You can program these switches to switch more than one **Wise receiver**.

The 3 Channel ID Switches are not compatible with the three-button dimming function on the Scenebox, DimLED, and Fusions systems.

The 7 channel switch can be used as a scene setting switch, a colour changing control switch, or as a regular switch able to control up to 7 independent circuits. This switch is compatible with every receiver within the **Wise Controls** range.

The battery life lasts up to five years.

#### Key Benefits

- Compatible with all receivers
- Recessed against the wall
- Radio switches require no wiring

### Wise Controls Introduction Video

