


Dali LED Drivers

DALI-1 Dimmable LED Driver (Constant Current & Constant Voltage)

9W-32W 350mA, 500mA, 700mA



MR. RESISTOR®
Lighting Specialist Est. 1968

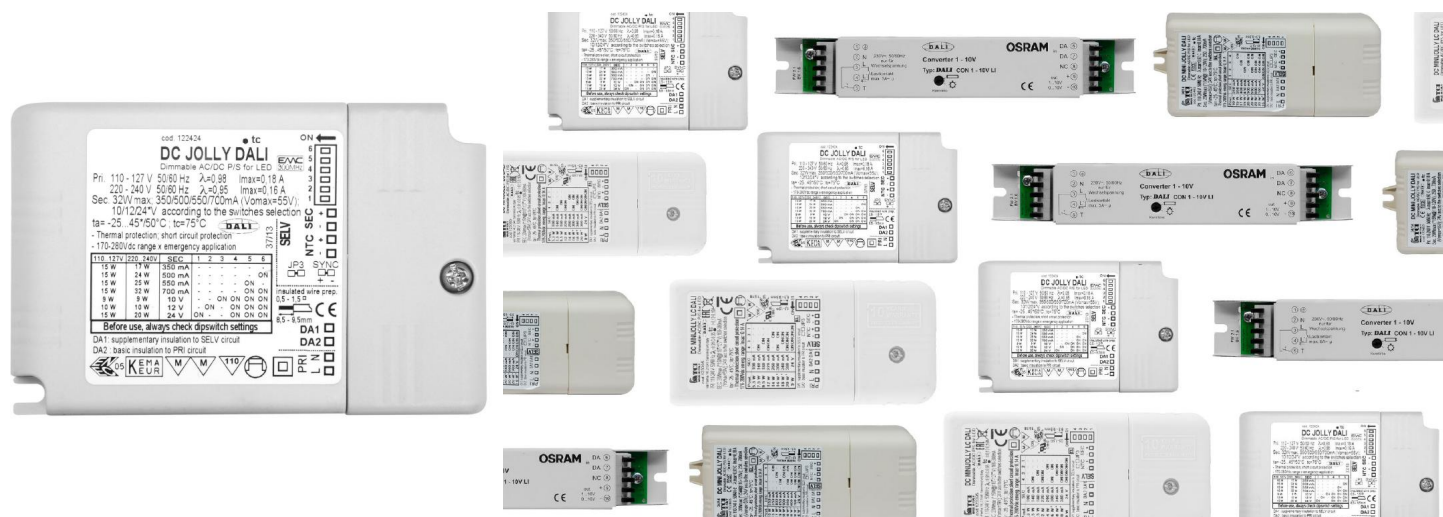

DCJOLLY DALI

9W-32W 350mA, 500mA, 700mA

Quicklink: Q3AE9

General

Colour	White
Construction	Plastic
Dimmable	Yes

Dimmable	Yes
----------	-----

Dimensions

Depth	21mm
Length	100mm
Width	65mm

Electrical

Amperage	350mA, 500mA, 700mA
Maximum Wattage	32W
Transformer	Electronic
Voltage	10V, 12V, 24V

The **DCJolly Dali** is a revolutionary multi voltage power supply which allows LEDs to be dimmed from any Dali dimming system.

A series of dipswitches gives the user the option to flick the output to any of the following voltages (and maximum loads):

350mA (15W), 500mA (22W {15W @ 120V}), 700mA (25W {15W @ 120V}), 10V (9W), 12V (10W), and 24V (20W {15W @ 120V}).