


Dali LED Drivers

Dali Dimmable LED Driver (Constant Current & Constant Voltage)

9W-32W 10,12,24V



MR. RESISTOR[®]
Lighting Specialist Est. 1968

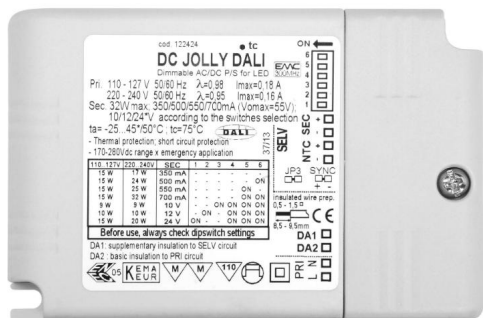

DCJOLLY DALI

9W-32W 10,12,24V

Quicklink: Q3AE9

General

Colour White
Construction Plastic
Dimmable Yes

Dimmable Yes

Dimensions

Depth 21mm
Length 100mm
Width 65mm

Electrical

Amperage 350mA, 500mA,
700mA
Maximum Wattage 32W
Transformer Electronic
Voltage 10V, 12V, 24V

The **DCJolly Dali** is a revolutionary multi voltage power supply which allows LEDs to be dimmed from any Dali dimming system.

A series of dipswitches gives the user the option to flick the output to any of the following voltages (and maximum loads):

350mA (15W), 500mA (22W {15W @ 120V}), 700mA (25W {15W @ 120V}), 10V (9W), 12V (10W), and 24V (20W {15W @ 120V}).