


# Dali LED Drivers

## Dali Dimmable LED Driver (Constant Current & Constant Voltage)

9W-32W 10,12,24V

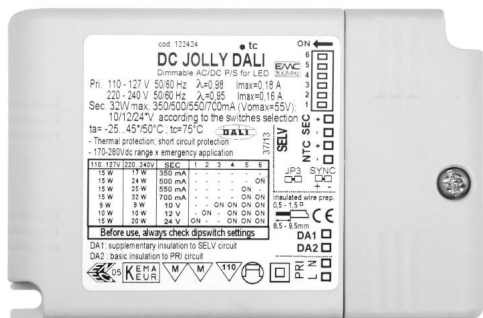

### DCJOLLY DALI

9W-32W 10,12,24V

Quicklink: Q3AE9

#### General

Colour White  
Construction Plastic  
Dimmable Yes

Dimmable Yes

#### Dimensions

Depth 21mm  
Length 100mm  
Width 65mm

#### Electrical

Amperage 350mA, 500mA,  
700mA  
Maximum Wattage 32W  
Transformer Electronic  
Voltage 10V, 12V, 24V

The DCJolly Dali is a revolutionary multi voltage power supply which allows LEDs to be dimmed from any Dali dimming system.

A series of dipswitches gives the user the option to flick the output to any of the following voltages (and maximum loads):

350mA (15W), 500mA (22W {15W @ 120V}), 700mA (25W {15W @ 120V}), 10V (9W), 12V (10W), and 24V (20W {15W @ 120V}).