


Dali LED Drivers

DALI-2 Dimmable LED Driver (Constant Current & Constant Voltage)

10W-20W 250mA - 700mA



MR. RESISTOR®
Lighting Specialist Est. 1968

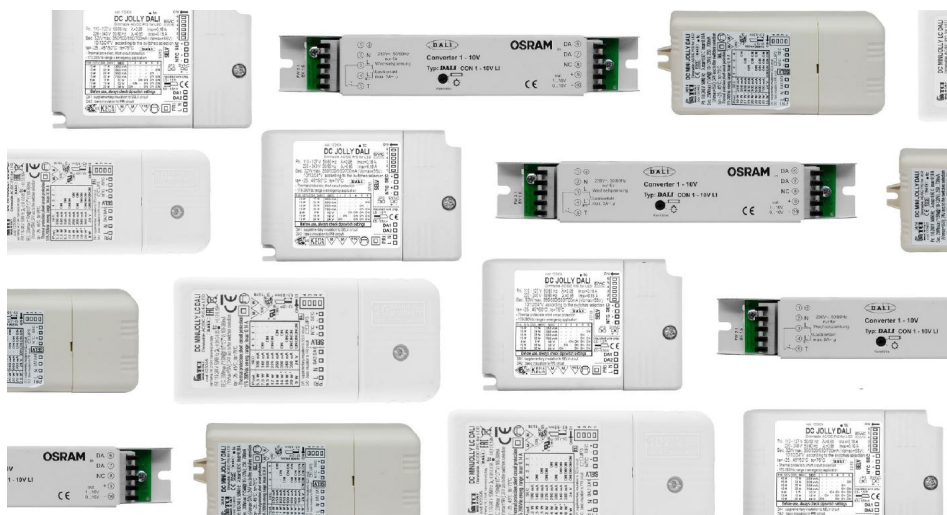

DCJOLLY DALI MIN

10W-20W 250mA - 700mA

Quicklink: Q3F15

General

Colour	White
Construction	Plastic
Dimmable	Yes

Dimensions

Depth	22mm
Length	110mm
Width	52mm

Electrical

Amperage	250mA, 350mA, 400mA, 450mA, 500mA, 550mA, 600mA, 700mA
Maximum Wattage	20W
Voltage	24V

The **DCJolly Dali** is a revolutionary multi voltage power supply which allows LEDs to be dimmed from any Dali dimming system.

A series of dipswitches gives the user the option to flick the output to any of the following voltages (and maximum loads):

- 250mA (10W)
- 350mA (15W)
- 400mA (17W)
- 450mA (19W)
- 500mA (20W)
- 550mA (20W)
- 600mA (20W)
- 700mA (20W)
- 24V (16W)