


1-10V LED Drivers

1-10V Dimmable LED Driver (Constant Current & Constant Voltage)
White Multi Wattage / Multi Voltage

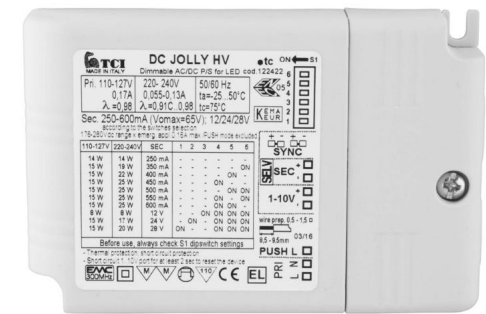

DCJOLLYMIDI 1-10

White Multi Wattage / Multi Voltage
Quicklink: Q44A2

General

Colour	White
Construction	Plastic
Dimmable	Yes
Maximum 1 Watt LED's	9 - 25
Wiring	Series / Parallel

Dimensions

Height	21mm
Length	103mm
Maximum LED to Driver Length	20m
Width	67mm

Electrical

Amperage	250mA, 350mA, 400mA, 450mA, 500mA, 550mA, 600mA
Maximum Wattage	25W
Output Voltage	9W
Transformer	Electronic
Voltage	12V, 24V, 28V

The DCJolly 250-600mA is a revolutionary multi voltage power supply which allows LEDs to be dimmed from any 0 - 10V / 1 - 10V dimming system.

Standard 0/1-10V Dimmer

This is the most popular type of dimmer used with this interface as it is most commonly used in the home and will easily fit into existing back boxes. A 1-10V *Wired Dimming Switch* and 1-10V *High Frequency Dimmer Module* for creating your own switch plate are available.

Lutron 0/1-10V Dimmer

This wired dimming switch has the same functionality and wiring as the standard 0/1-10V dimmer. Ideal for use where other Lutron switches are used and complimentary switches are required.

Wise Wireless Dimming 0/1-10V

Any Wise switch can be used in conjunction with this interface to control your *Seamless DimLine/DimSlim*. A *WisePack 0-10V Dimming* is required and connected between mains and the Feelux interface to receive the wireless signal. This option has the benefit of being able to control your fluorescents wirelessly, without the need for wiring to a fixed switch. Different switch types are available, including a small convenient keyfob switch.

RAKO Wireless Dimming 0/1-10V

Just like the Wise wireless dimming option, a *RAKO Wireless Wall Switch* can be used to control your fluorescents wirelessly with no need for wiring. A RAKO/Wise 0-10V Interface will need to be connected between the mains and the Feelux interface.

PIR Sensor Dimming

Alternatively, instead of using a dimmer/switch, a *PIR Occupancy Switch* sensor could be used which will automatically turn your lights on and off as well as dim them depending on light levels.

Wattage	Secondary
14W	250mA
19W	350mA

1-10V LED Drivers

1-10V Dimmable LED Driver (Constant Current & Constant Voltage)
White Multi Wattage / Multi Voltage



MR. RESISTOR[®]
Lighting Specialist Est. 1968

22W	400mA
25W	450mA
25W	500mA
25W	550mA
25W	600mA
8W	12V
17W	24V
20W	28V

