


# Dali LED Drivers

DALI-1 Dimmable LED Driver (Constant Current & Constant Voltage)

5.3W-20W 100mA - 380mA



**MR. RESISTOR**<sup>®</sup>  
Lighting Specialist Est. 1968

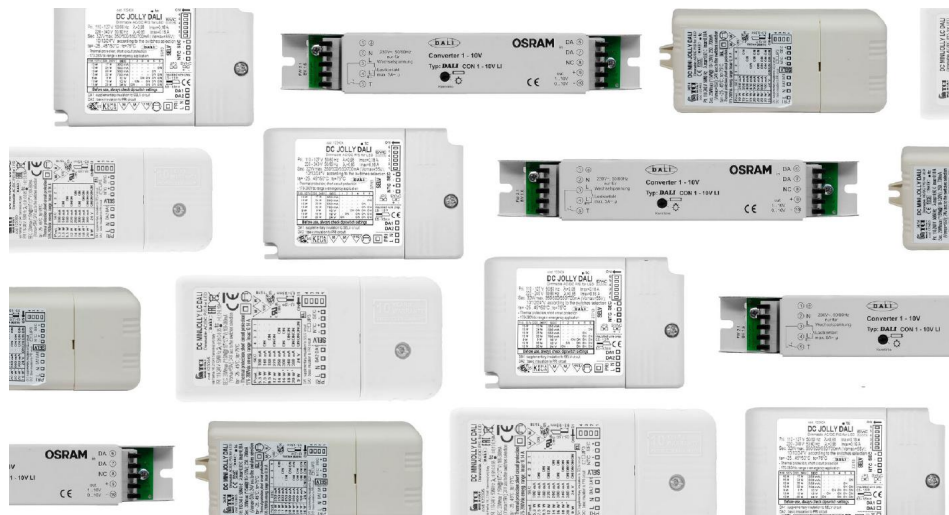

## DCJOLLY DALI MA1

5.3W-20W 100mA - 380mA

Quicklink: Q4B54

The DC Mini Jolly Dali is a revolutionary multi voltage power supply which allows LEDs to be dimmed from any Dali dimming system.

A series of dipswitches gives the user the option to flick the output to any of the following voltages (and maximum loads):

### General

Colour White  
Construction Plastic  
Dimmable Yes

Dimmable Yes

### Dimensions

Depth 22mm  
Length 110mm  
Width 51mm

### Electrical

Amperage 100mA, 140mA,  
180mA, 220mA,  
260mA, 300mA,  
340mA, 380mA  
Maximum Wattage 20W  
Transformer Electronic  
Voltage 24V

- 100mA (5.3W)
- 140mA (7.5W)
- 180mA (9.5W)
- 220mA (12W)
- 260mA (14W)
- 300mA (16W)
- 340mA (18W)
- 380mA (20W)
- 24V (9W)