


Dali LED Drivers

DALI-2 Dimmable LED Driver (Constant Current & Constant Voltage)

5.3W-20W 100mA - 380mA



MR. RESISTOR®
Lighting Specialist Est. 1968

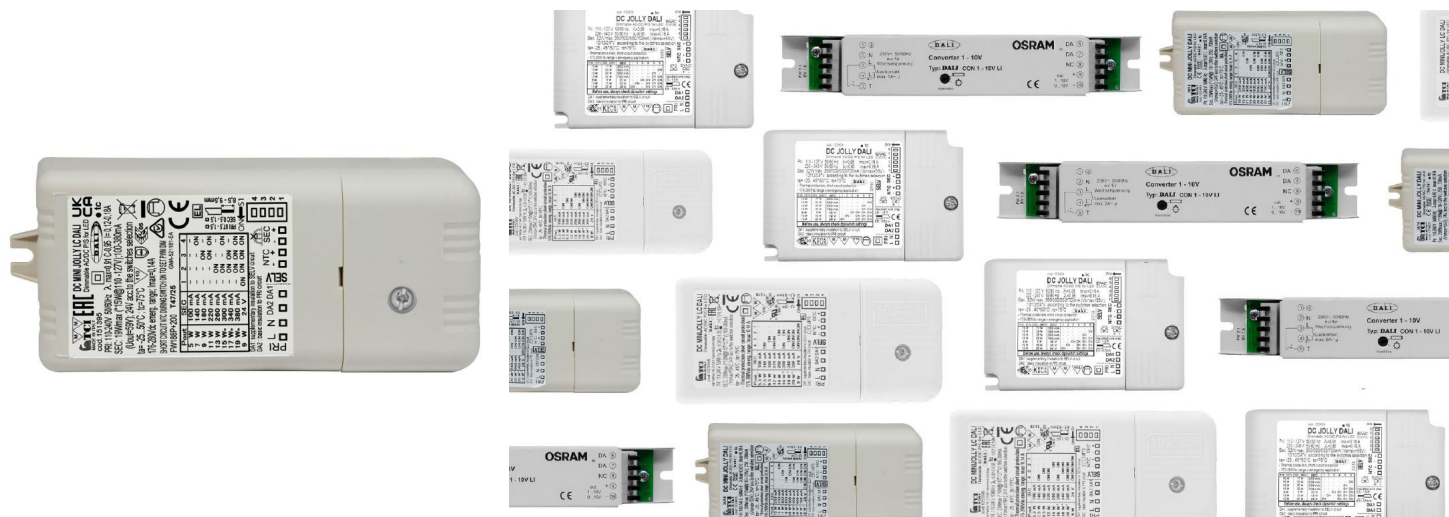

DCJOLLY DALI MA1

5.3W-20W 100mA - 380mA

Quicklink: Q4B54

General

Colour	White
Construction	Plastic
Dimmable	Yes

Dimensions

Depth	22mm
Length	110mm
Width	51mm

Electrical

Amperage	100mA, 140mA, 180mA, 220mA, 260mA, 300mA, 340mA, 380mA
Maximum Wattage	20W
Voltage	24V

The DC Mini Jolly Dali is a revolutionary multi voltage power supply which allows LEDs to be dimmed from any Dali dimming system.

A series of dipswitches gives the user the option to flick the output to any of the following voltages (and maximum loads):

- 100mA (5.3W)
- 140mA (7.5W)
- 180mA (9.5W)
- 220mA (12W)
- 260mA (14W)
- 300mA (16W)
- 340mA (18W)
- 380mA (20W)
- 24V (9W)