


Switching LED Drivers

LED Driver Converter (Constant Current)

6-30V Input | 350mA Output



MR. RESISTOR[®]
Lighting Specialist Est. 1968

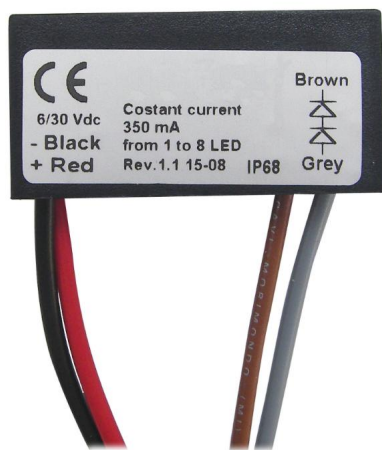

WISE CONVERTER 3

6-30V Input | 350mA Output

Quicklink: Q187D

General

Colour	Black
Construction	Plastic
Dimmable	No

Dimensions

Height	22mm
Length	21mm
Width	41mm

Electrical

Amperage	350mA
Maximum Wattage	7W

The **Wise Converter 3** is a power supply that is used to drive 350mA LEDs, but only requires an input of anything between 6 to 30V. This makes it ideal for use on boats, cars, caravans, or motorbikes where the supply is limited to low voltage, or for powering direct from a battery. Perfect for running 350mA LED lights from an existing 12V or 24V power supply

Any wattage 350mA LED can be used, but cannot exceed a maximum of 8 units wired in series, or 7W.

This product is rated IP68 so is suitable for use in wet and humid environments. Includes thermic and short circuit protection.