

Feelux LED FLXible Neon 2 Vertical Bend 24V

FLXible Neon 2 24V 5M - Vertical Bend Left Side Feed (12mm)

50W (10W/m) 3000K Warm White



MR. RESISTOR
Lighting Specialist Est. 1968



FN2-30K-LS-24V5M

50W (10W/m) 3000K Warm White

Quicklink: Q6085

General

Dimmable	Yes
IP Rating	IP67

Dimensions

Cut Length	38.5mm
Height	10mm
Length	5m
Width	12mm

Electrical

Maximum Wattage	50W (5 x 10W)
Voltage	24V DC

Light Characteristics

Colour Rendering Index	90
Colour Temperature	3000K Warm White
Lumens	2720 lm
Lumens Per Watt	54 lm/W

FLXible NeoN, is super slim flexible LED with spot-free output for indoor and outdoor application for displays, cabinets, furniture and coves. Neon 1 bends horizontally while Neon 2 bends vertically; both are dimmable, have 4W/ft., 24V DC and are available in customised lengths. Neon 2 Left Side has the feed termination on the side.

- Bend direction vertical
- Ultra slim spot free illumination
- Dimmable with 0-10V, forward/reverse phase
- Indoor and outdoor application
- Field Cuttable (38.5mm) for customized length
- 5M reels
- IP Rating: IP67 with Factory Termination (the product is sealed by the manufacturer) / IP65 with Field Termination (customizing the reel length and attaching the endcap lowers the rating to IP65 - FN2-FIELD KIT required)

Power end, an end cap and 20 mounting clips + screws included.

Feelux LED FLXible Neon 2 Vertical Bend 24V


FLXible Neon 2 24V 5M - Vertical Bend Left Side Feed (12mm)

50W (10W/m) 3000K Warm White




MR. RESISTOR®
Lighting Specialist Est. 1968


Left Side Feed

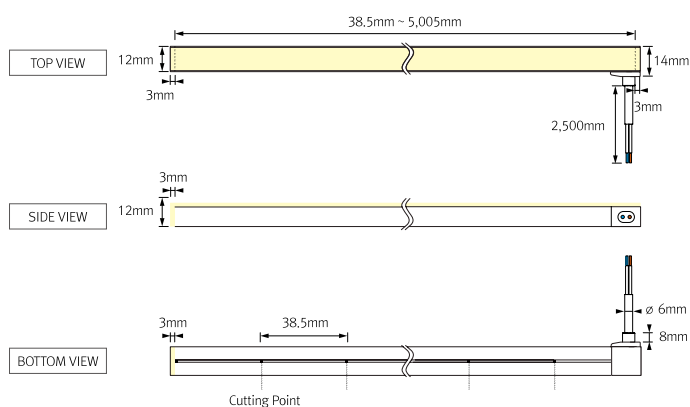

Installation

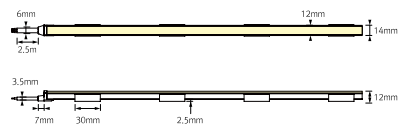

* Bracket Installation per 25cm is recommended
(4 pcs of brackets are provided per meter)
Additional Brackets can be used, if necessary

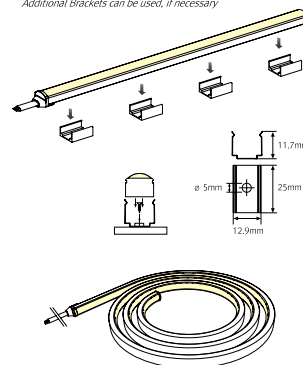

Physical specifications

