


Feelux LED FLXible Neon Narrow 2 Vertical Bend 24V

FLXible Neon Narrow 2 24V 5M - Vertical Bend (6mm)

36W (7.2W/m) 2200K Warm White



MR. RESISTOR
Lighting Specialist Est. 1968

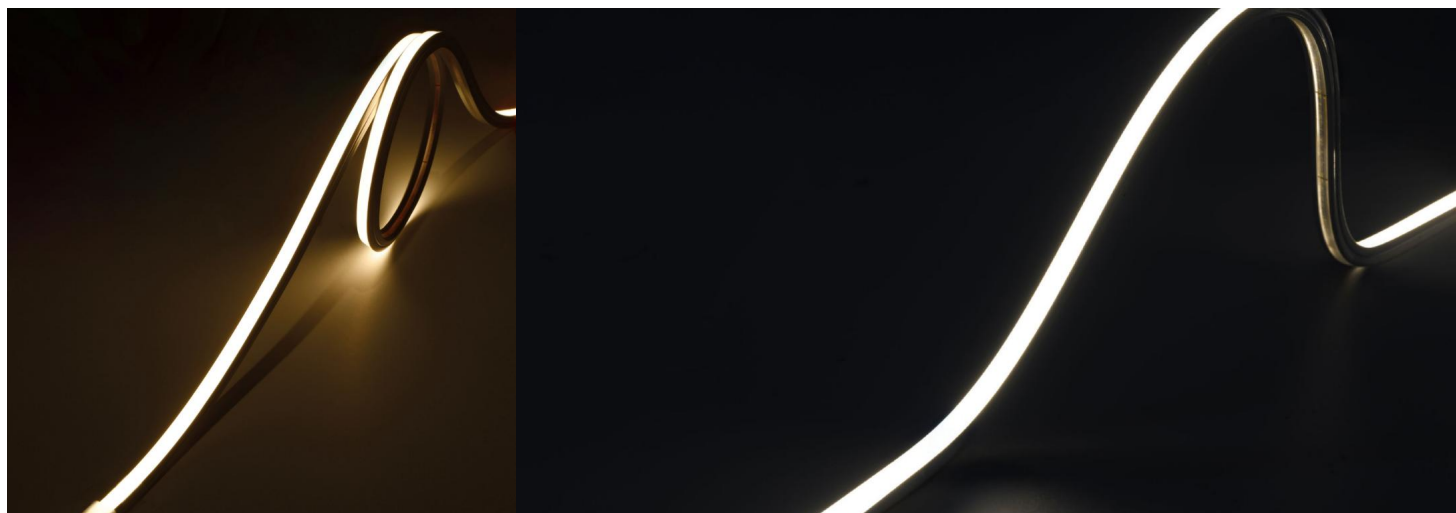

FNN2-5M-22K24VDE

36W (7.2W/m) 2200K Warm White

Quicklink: Q6C46

General

Construction	Silicone
Dimmable	Yes
IP Rating	IP65

Dimensions

Cut Length	33.3mm
Height	6mm
Length	5m
Width	6mm

Electrical

Maximum Wattage	36W (5 x 7.2W)
Voltage	24V

Light Characteristics

Beam Angle	130°
Colour Temperature	2200K Warm White
Lumens	2441 lm
Lumens Per Watt	68 lm/W

FLXible Narrow Neon, is super slim flexible LED with spot-free output for indoor and outdoor application for displays, cabinets, furniture and coves. Neon Narrow 1 bends horizontally while Neon 2 bends vertically; both are dimmable, FNN2 have 7.2W/M., 24V DC

Features

- Seamless Diode Free Illumination
- Power Input: DC 24V
- Bend Direction Vertical
- Lamp Power: 7.2 W/m
- IP Rate: IP 65
- Colour Rendering: Ra > 90
- Operating Temperature: 0°~45° (32°F ~ 113°F)
- Maximum Length: 5,000mm (16.4')
- Minimum Length: 33.3mm (1.31')
- Minimum Bending Diameter: 75mm(2.95')
- Beam Angle: 130°
- Material: Silicone
- Please note: this reel includes two power cords. For example, if you cut a 3.20m section, the remaining 1.8m segment will still have a plug and can be used independently. If you intend to use the 5m reel, you can either hide the power cord not in use or cut it, remove the end cap and put the new endcap on.

This Kit Includes: 5 metre reel with two power cords, 20 mounting brackets + screws, and end cap (2pc)

Feelux LED FLXible Neon Narrow 2 Vertical Bend 24V

FLXible Neon Narrow 2 24V 5M - Vertical Bend (6mm)

36W (7.2W/m) 2200K Warm White



MR. RESISTOR®
Lighting Specialist Est. 1968

