


PIR Floodlight

LEDPRO PIR Outdoor Garden CCT Floodlight IP65 240V

Black 30W Selectable CCT (3000K/4000K/5000K)



MR. RESISTOR®
Lighting Specialist Est. 1968

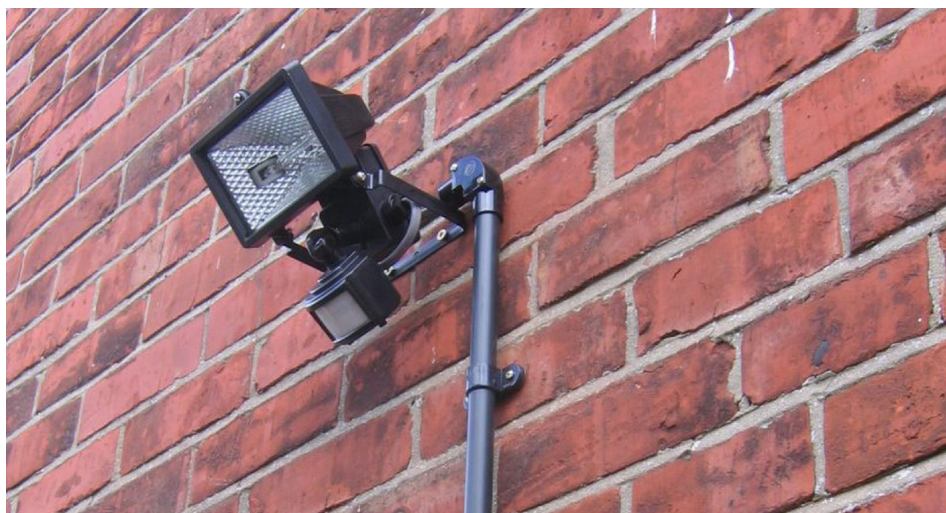

LEDPRO31B

Black 30W Selectable CCT

(3000K/4000K/5000K)

Quicklink: Q6E49

General

Colour	Black
Dimmable	No
IP Rating	IP65
Weight	690g

Dimensions

Depth	125mm
Height	145mm
Width	200mm

Electrical

Energy Efficiency Rating	D
Maximum Wattage	30W
Voltage	240V

Light Characteristics

Beam Angle	114°
Colour Rendering Index	80
Lumens	120 lm
Lumens Per Watt	4 lm/W

The **CCT3 LEDPRO Floodlight** is designed for high-performance illumination in residential and commercial environments, delivering powerful, adjustable output with long-term reliability.

Up to 3105 lumens depending on the selected colour temperature, this floodlight uses a wide 114° beam angle to achieve broad, uniform coverage ideal for driveways, building facades, gardens, service yards, and security zones.

Its CCT-switchable LED module allows precise colour selection between 3000K, 4000K, and 5000K, enabling tailored lighting to match application needs — from warm ambient lighting to high-clarity security illumination. Built with a die-cast aluminium housing, toughened IK07-rated glass diffuser, and IP65 environmental protection, the unit is engineered to withstand dust ingress, rain, and low-pressure jets, ensuring durability in harsh outdoor conditions.

Designed with an installer-friendly approach, the floodlight integrates fully rewirable push-fit loop-in/loop-out terminals and a slave link terminal for multi-floodlight setups.

See linked items for optional Plug & Play PIR module allow scalable automation, including motion detection, dusk-to-dawn operation, and manual override.

Key Features

- 30W LED output for high-efficiency lighting.
- Colour Temperature: Switchable 3000K / 4000K / 5000K (CCT3)
- Luminous Flux: 2835 lm (3000K) / 3105 lm (4000K) / 2970 lm (5000K)
- Beam Angle: Wide 114° beam for large-area wash lighting
- IP65 dust/water protection
- IK07 impact-resistant toughened glass diffuser
- Fully rewirable push-fit terminals (loop-in/loop-out)
- Control Compatibility: Optional Plug & Play PIR sensor (with manual override) and photocell for automated control.
- Dimension: 145mm (H) x 200 (W) x 125 (D)
- Dual Plug and Play PIR (Manual Override) and Photocell option with linkable control (See linked items)
- Includes Slave terminal for linking extra lights to a single sensor
- Includes Adjustable mounting bracket and fixings included for ease of installation

PIR Floodlight

LEDPRO PIR Outdoor Garden CCT Floodlight IP65 240V
Black 30W Selectable CCT (3000K/4000K/5000K)



MR. RESISTOR[®]
Lighting Specialist Est. 1968

- Includes 2 x IP65 Compression glands included for loop in-out wiring