


Rigel Trimless

Rigel 40 Trimless Fire-Rated Wall-Washer 883lm Downlight
7W 3000K Warm White White

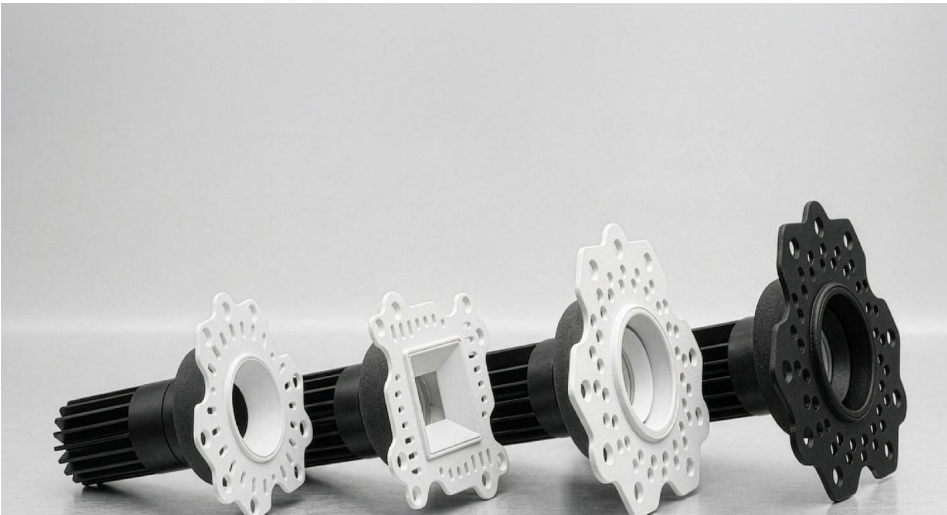

RIGEL40 RD W/W73K

7W 3000K Warm White White
Quicklink: Q6E69

General

Colour	White
Construction	Aluminium
Dimmable	Yes
IP Rating	IP20

Dimensions

Cut Out	73mm (Diameter)
Diameter	42mm
Height	73mm
Minimum Ceiling Depth	69mm

Electrical

Maximum Wattage	7W
-----------------	----

Light Characteristics

Colour Rendering Index	90
Colour Temperature	3000K Warm White
Lumens	883 lm
Lumens Per Watt	126 lm/W

[Rigel Downlight Configurator](#)

Configure your Rigel downlight step by step, with full flexibility to customise it to your needs.

The **Rigel 40 Wall Washer** is an ultra-compact, fire-rated downlight designed to deliver flawless vertical illumination with exceptional precision.

Featuring a specialised asymmetric optical system, it projects light evenly from ceiling to floor, eliminating hot spots and shadows to create a clean, continuous wash across any wall surface. This refined grazing effect is ideal for enhancing textures, highlighting artwork and architectural details, or simply opening up a space by increasing the perceived height and brightness of a room.

Despite its minimal footprint, the Rigel 40 offers a powerful lumen output with CRI 90+, ensuring superb colour accuracy and natural, true-to-life rendering on decorative and architectural surfaces. Its sleek, near-flush design blends seamlessly into the ceiling for a crisp, modern finish, while advanced anti-glare engineering ensures comfortable, visually balanced illumination.

Perfect for premium residential, hospitality and commercial environments, the Rigel 40 Wall Washer provides discreet, high-performance lighting that enhances interiors without drawing attention to the fixture itself.

The Rigel Trimless downlights can be connected together using their outer grid design, making it easy to line them up exactly how you want. You can keep it simple with a double downlight, run them in a straight line, or get more creative with shapes like circles. The connected grids help everything stay neat and evenly spaced, without hassle.


Please note: This fitting requires a separate driver, available in the Linked Items section. Ensure the driver is set to 200 mA or below. When using a TRIAC driver, set it to 180 mA

Installation recommendation: For optimal wall washing, install the downlight approximately 50cm away from the wall. At a typical ceiling height of 2.5 m, this position allows the asymmetric beam to overlap evenly, producing uniform illumination across the full height of the wall without hotspots or dark areas.

Rigel Trimless

Rigel 40 Trimless Fire-Rated Wall-Washer 883lm Downlight
7W 3000K Warm White White

RIGEL 40 Wall-Washer with 7W Module

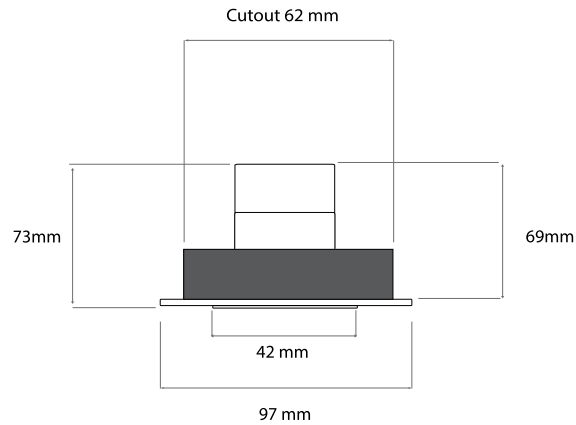

RIGEL TRIMLESS WALL WASHER DOWNLIGHT
Installation Recommendation

