


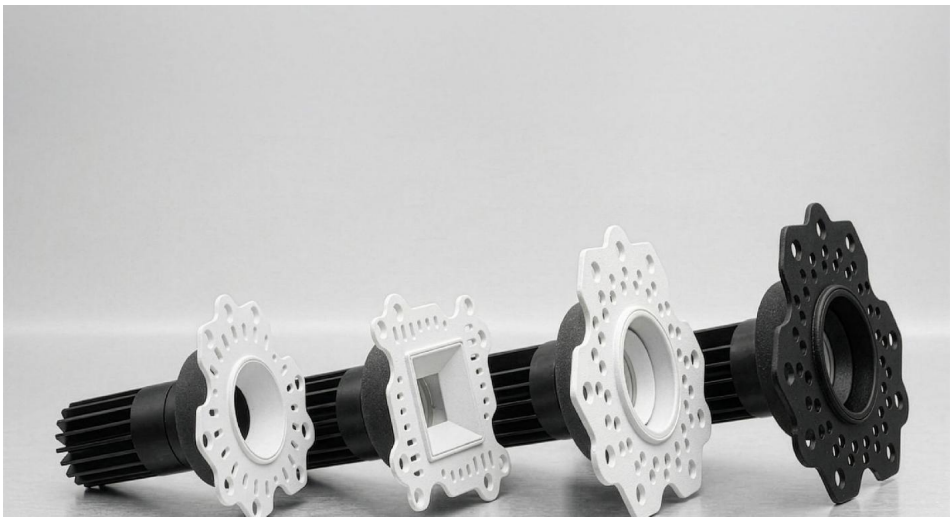

## RIGEL40 RD A 24D927K

9W 2700K Warm White 24° White
Quicklink: Q6E93

### General

| | |
|---|---|
| Colour | White |
| Construction | Aluminium |
| Dimmable | Yes |
| IP Rating | IP44 |

### Dimensions

| | |
|---|---|
| Cut Out | 62mm (Diameter) |
| Diameter | 42mm |
| Minimum Ceiling Depth | 96mm |
| Vertical Rotation | 30° |

### Electrical

| | |
|---|---|
| Maximum Wattage | 9W |

### Light Characteristics

| | |
|---|---|
| Beam Angle | 24° |
| Colour Rendering Index | 90 |
| Colour Temperature | 2700K Warm White |
| Lumens | 1082 lm |
| Lumens Per Watt | 120 lm/W |

The **Rigel 40 Adjustable** is a miniature, fire-rated downlight designed for precise, directional lighting in a compact, unobtrusive form. Despite its exceptionally small size, it delivers a powerful lumen output with CRI 90+ for outstanding colour accuracy and clarity.

Its smooth adjustable tilt makes it ideal for highlighting walls, artwork, niches or architectural features, providing subtle yet effective accent lighting for premium residential and commercial interiors.


Built around a miniature integrated LED module, it requires no lamp replacement and ensures long-life, consistent performance. The plaster-in housing allows the downlight to sit perfectly flush within the ceiling, creating a seamless, minimalist finish that blends effortlessly into the surrounding architecture. Its advanced anti-glare optical design ensures comfortable, controlled illumination, while the compact and smart plug and play construction makes installation straightforward.

**Please note**: This fitting requires a separate driver, available in the Linked Items section.



t: +44 (0)20 8874 2234 e: info@mr-resistor.co.uk **www.mr-resistor.co.uk**

RIGEL 40Adjustable with 9WModule

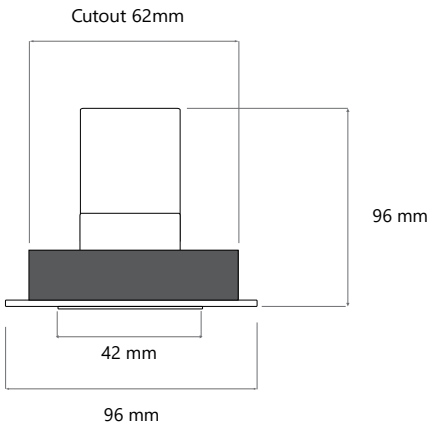




t: +44 (0)20 8874 2234 e: info@mr-resistor.co.uk www.mr-resistor.co.uk