


# Inter-Plus LED Extrusion Profile - Ceiling

Inter Plus Suspended Linear Triac Dimmable LED Light Profile Pendant System 2m  
Anodised Aluminium 38.4W 2700K Warm White

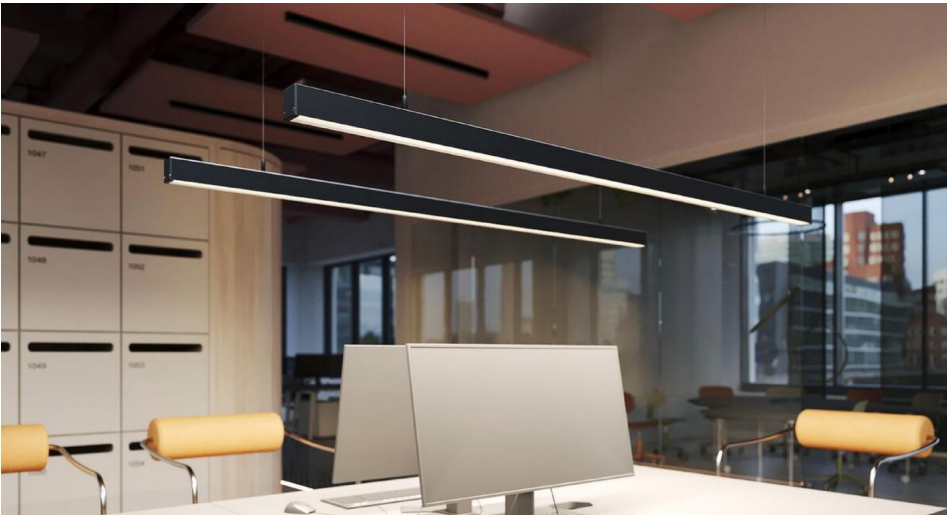

## INTER-P-KA2M27

Anodised Aluminium 38.4W 2700K Warm White  
Quicklink: Q6EB4

### General

|              |                    |
|--------------|--------------------|
| Colour       | Aluminium          |
| Construction | Anodised Aluminium |
| Dimmable     | Yes                |
| IP Rating    | IP20               |

### Dimensions

|        |      |
|--------|------|
| Depth  | 60mm |
| Length | 2m   |
| Width  | 50mm |

### Electrical

|                 |       |
|-----------------|-------|
| Maximum Wattage | 38.4W |
| Voltage         | 24V   |

### Light Characteristics

|                        |                  |
|------------------------|------------------|
| Colour Rendering Index | 90               |
| Colour Temperature     | 2700K Warm White |
| Lumens                 | 3400 lm          |
| Lumens Per Watt        | 89 lm/W          |

### Modular Design

Available in 2 metre and 3 metre lengths, the profiles can be cut to almost any size and connected to create continuous runs powered from a single electrical point. Optional 90 degree corner connectors (130mm) allow you to build simple geometric shapes like squares or rectangles. X and T junctions are only available by request. ZM-180 Connector need to be purchased when using the corners (4 units per corner)

### Suspended Installation

Each kit includes 2 metre wire for a floating appearance. Only two suspension points are required per module, positioned 200mm from each end as standard, with the option to adjust or extend the suspension as needed.

### Glare Controlled Light for Offices

A microprismatic diffuser (UGR <19), available separately, offers soft, balanced light that reduces glare and improves visual comfort

### Customisation

The Inter-Plus system offers broad flexibility for projects requiring something beyond the standard setup. Profiles can be supplied in varied lengths, including custom cuts; LED tape can be specified in alternative formats such as RGBW, CCT or RGB or higher output options; and layouts can be adapted into larger or bespoke shapes, allowing the system to be tailored to different design and functional requirements.

For bespoke configurations or a tailored quotation, please contact our sales or design team.

[Get in touch](#)

# Inter-Plus LED Extrusion Profile - Ceiling

Inter Plus Suspended Linear Triac Dimmable LED Light Profile Pendant System 2m  
Anodised Aluminium 38.4W 2700K Warm White

