


Inter-Plus LED Extrusion Profile - Ceiling

Inter Plus Suspended Square Triac Dimmable LED Light Profile Pendant System 2260mx2260m
White 192W 3000K Warm White

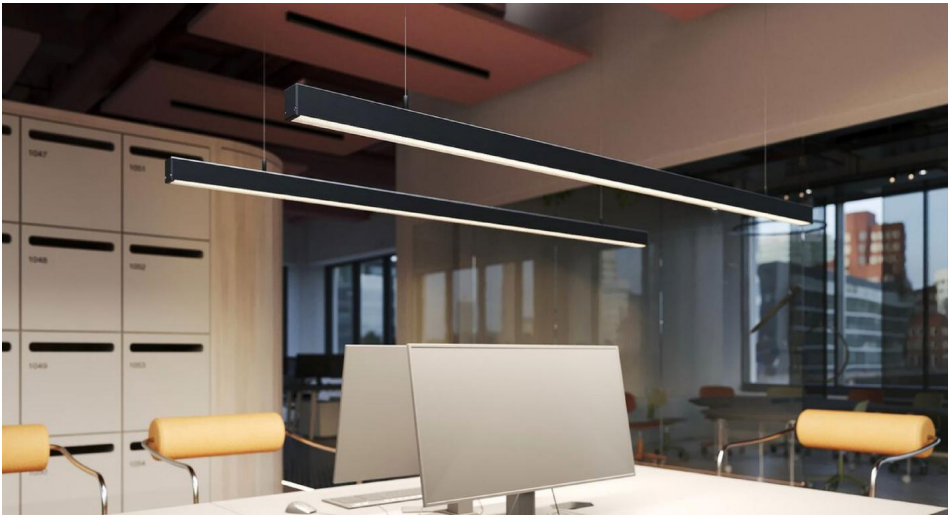

INTER-P-KWSQM3

White 192W 3000K Warm White
Quicklink: Q6F14

General

Colour	White
Construction	Anodised Aluminium
Dimmable	Yes
IP Rating	IP20

Dimensions

Cable Length	2m
Depth	60mm
Length	2260mm
Width	50mm

Electrical

Maximum Wattage	192W
Voltage	24V

Light Characteristics

Colour Rendering Index	90
Colour Temperature	3000K Warm White
Lumens	17000 lm
Lumens Per Watt	89 lm/W

The **Inter-Plus Ceiling Kit** is a clean, modern suspended linear lighting system crafted from lightweight aluminium. It offers a sleek architectural finish suitable for offices, studios, retail environments and contemporary residential interiors, delivering both style and performance in one continuous line of light. It is ideal for commercial projects such as offices and showrooms, delivering reliable performance with a clean, contemporary appearance. The system is mains dimmable, with a DALI dimming option also available if required.

Modular Design

Available in 2 metre and 3 metre lengths, the profiles can be cut to almost any size and connected to create continuous runs powered from a single electrical point. Optional 90 degree corner connectors (130mm) allow you to build simple geometric shapes like squares or rectangles. X and T junctions are only available by request.

Suspended Installation

Each kit includes 2 metre wire for a floating appearance. Only two suspension points are required per module, positioned 200mm from each end as standard, with the option to adjust or extend the suspension as needed.

Glare-Controlled Light for Offices

A micropismatic diffuser (UGR <19), available separately, offers soft, balanced light that reduces glare and improves visual comfort

Customisation

The **Inter-Plus** system offers broad flexibility for projects requiring something beyond the standard setup. Profiles can be supplied in varied lengths, including custom cuts; LED tape can be specified in alternative formats such as RGBW, CCT or RGB or higher output options; and layouts can be adapted into larger or bespoke shapes, allowing the system to be tailored to different design and functional requirements.

For bespoke configurations or a tailored quotation, please contact our sales or design team.

PLEASE NOTE: These products are assembled to order. Even if shown as in stock, please


Inter-Plus LED Extrusion Profile - Ceiling

Inter Plus Suspended Square Triac Dimmable LED Light Profile Pendant System 2260mx2260m


White 192W 3000K Warm White

allow at least one working day per item for assembly before dispatch.

[Get in touch](#)

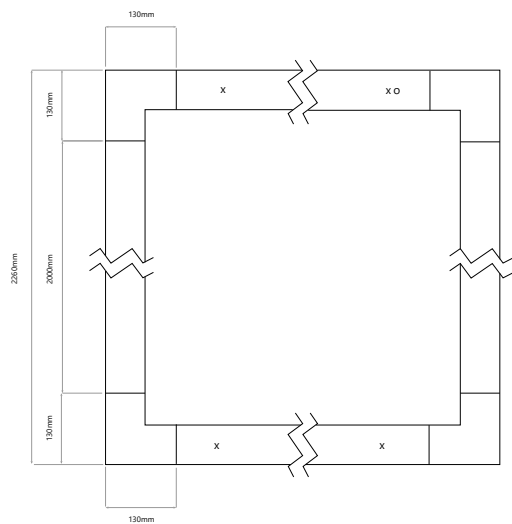

*This drawing represent the basic configuration of 2mx2m profile lenght.
Light System Lenght, Suspension Wires and Wire Lenght is completely customizable upon request.

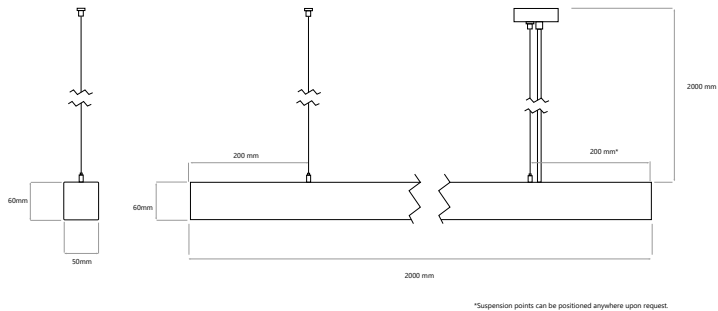

*Suspension points can be positioned anywhere upon request.