


Inter-Plus LED Extrusion Profile - Ceiling

Inter Plus Suspended Linear DALI-2 Dimmable LED Light Profile Pendant System 3m
Black 57.6W 3000K Warm White

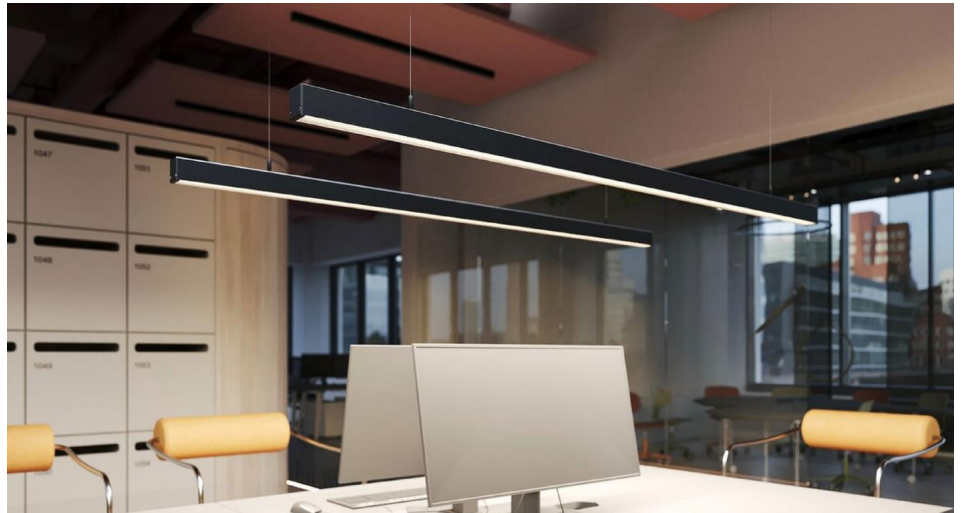

INTER-P-KB3M3 D

Black 57.6W 3000K Warm White
Quicklink: Q6F3D

General

| | |
|--------------|-----------|
| Colour | Black |
| Construction | Aluminium |
| Dimmable | Yes |
| IP Rating | IP20 |

Dimensions

| | |
|--------|------|
| Depth | 60mm |
| Length | 3m |
| Width | 50mm |

Electrical

| | |
|-----------------|-------|
| Maximum Wattage | 57.6W |
| Voltage | 24V |

Light Characteristics

| | |
|------------------------|------------------|
| Colour Rendering Index | 90 |
| Colour Temperature | 3000K Warm White |
| Lumens | 5100 lm |
| Lumens Per Watt | 89 lm/W |

The **Inter-Plus Ceiling Kit** is a clean, modern suspended linear lighting system crafted from lightweight aluminium. It offers a sleek architectural finish suitable for offices, studios, retail environments and contemporary residential interiors, delivering both style and performance in one continuous line of light. The system is mains dimmable, with a DALI dimming option also available if required.

Modular Design

Available in 2 metre and 3 metre lengths, the profiles can be cut to almost any size and connected to create continuous runs powered from a single electrical point. Optional 90 degree corner connectors (130mm) allow you to build simple geometric shapes like squares or rectangles. X and T junctions are only available by request. ZM-180 Connector need to be purchased when using the corners (4 units per corner)

Suspended Installation

Each kit includes 2 metre wire for a floating appearance. Only two suspension points are required per module, positioned 200mm from each end as standard, with the option to adjust or extend the suspension as needed.

Glare Controlled Light for Offices

A microprismatic diffuser (UGR <19), available separately, offers soft, balanced light that reduces glare and improves visual comfort

Customisation


The Inter-Plus system offers broad flexibility for projects requiring something beyond the standard setup. Profiles can be supplied in varied lengths, including custom cuts; LED tape can be specified in alternative formats such as RGBW, CCT or RGB or higher output options; and layouts can be adapted into larger or bespoke shapes, allowing the system to be tailored to different design and functional requirements.

For bespoke configurations or a tailored quotation, please contact our sales or design team.

[Get in touch](#)

Inter-Plus LED Extrusion Profile - Ceiling

Inter Plus Suspended Linear DALI-2 Dimmable LED Light Profile Pendant System 3m
Black 57.6W 3000K Warm White

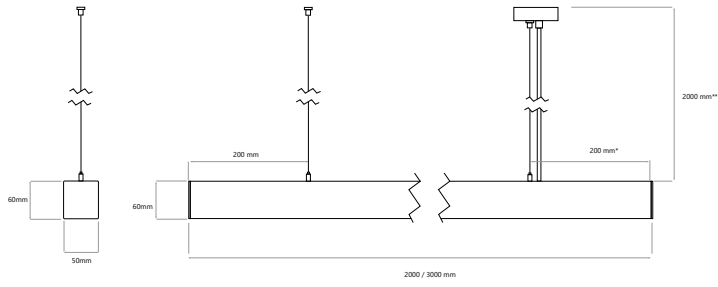

*Suspension points can be positioned anywhere upon request.
**Wide length upon request