


Larko LED Extrusion Profile - Ceiling

Larko Recessed LED Tape Extrusion Profile
White 2000mm

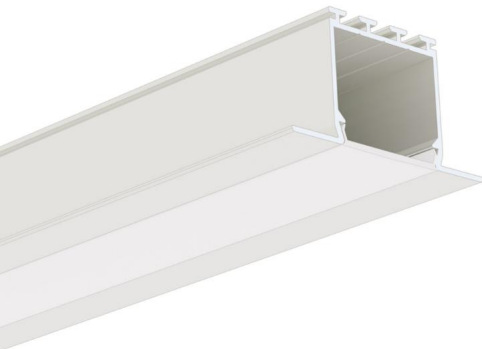

LARKO WHITE 2.0M

White 2000mm
Quicklink: Q6F8D

General

Colour	White
Construction	Aluminium

Dimensions

Depth	25mm
Length	2m
Minimum Ceiling Depth	24mm
Width	46mm

The **Larko Profile** is dedicated to be mounted into ceilings and drywall. Their height was designed the way that they can produce a single line of light with LEDs spaced 15mm apart and a frosted cover HS 22. The extrusion can accomodate two of the 10mm wide LED strips. Extrusion can be mounted to a surface with mounting springs.

Parts Required

Extrusions

As many lengths of extrusion can be used as is desired. Any 1m or 2m piece can be positioned end to end with each other to make an unlimited distance.

Endcap

An Endcap is required for each circuit of extrusions being used. It is positioned on the end of the very last extrusion in the circuit and is used to stop dust from and moisture from interfering with the electrical components.

Powerend

An Powerend is required for each circuit of extrusions being used. It is positioned on the very first extrusion in the circuit and serves the same purpose as the Endcap. The powerend has a hole in the centre which allows a cable to be fed through to power the strips.

Diffuser

A diffuser is used to give the light a more even blend. Simply purchase the same amount of diffusers as you did with extrusions.

Will fit any tape with a maximum width of 10mm.

This extrusion has been anodized.

Product Video