


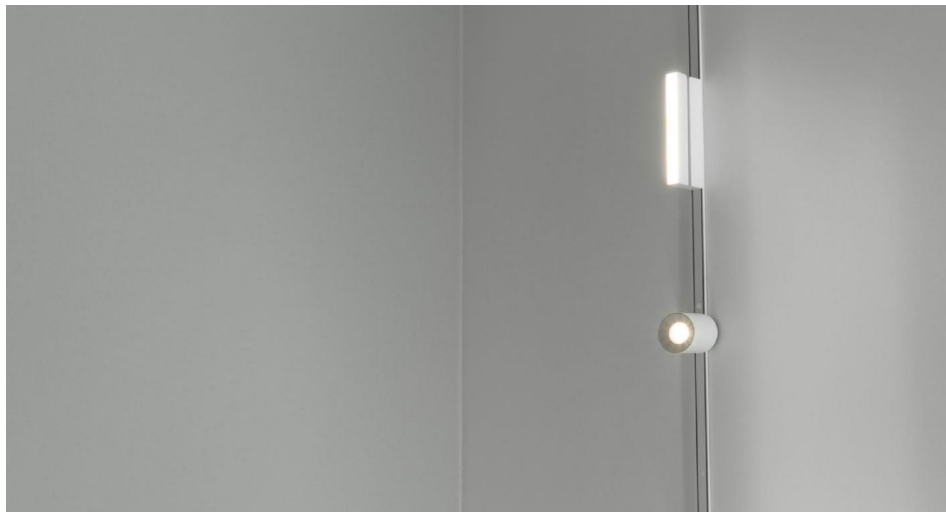

LAS2M COVE WHT

White 2000mm

Quicklink: Q6F94

General

Colour	White
Construction	Plastic

Dimensions

Length	2m
--------	----

Laser Track Configurator An installation accessory designed for plaster-in Magnetic Track Light System. Its main purpose is to act as a physical shield for the internal channel, protecting the copper electrical conductors and the track interior from dust, debris, and accidental paint or plaster splashes during the ceiling installation and skimming process.

How to use it

- **Install the Track** – Secure your plaster-in track into the ceiling or wall cutout according to your layout requirements.
- **Insert the Cover** – Before applying any plaster or paint, push the plastic cover directly into the open channel of the track and sits flush with the inner edges, completely sealing off the internal electrical elements
- **Plaster and Paint** – Proceed with applying your plaster or joint compound over the track's outer wings, feathering it smoothly onto the drywall. Paint as desired. Any stray plaster or paint will land safely on the plastic cover rather than ruining the track's interior.
- **Remove** – Once all painting and plastering work is entirely dry, carefully peel or pull the plastic cover out of the track.