


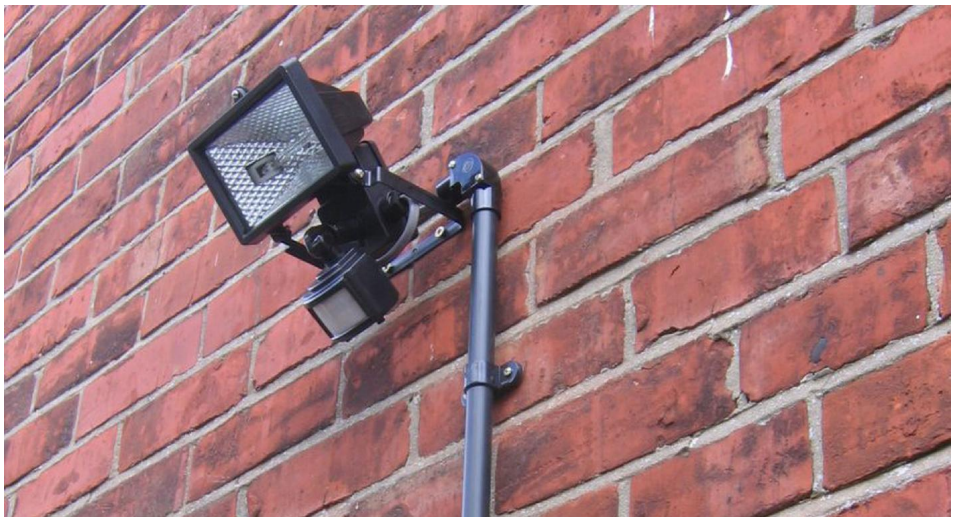

AZEK/1/BK CCT

Black 3000K/4000K/6000K
Quicklink: Q7039

General

Colour	Black
Construction	Polycarbonate
IK Rating	IK08
IP Rating	IP54
Weight	530g

Dimensions

Diameter	76mm
Length	280mm

Electrical

Maximum Wattage	24W
Voltage	240V

Light Characteristics


Beam Angle	180°
Colour Rendering Index	80
Lumens	2100 lm
Lumens Per Watt	88 lm/W


Flexible, compact, and economic polycarbonate LED adjustable twin head floodlight for greater flexibility and coverage. Selectable CCT 3000K/4000K/6500K, complete with PIR with manual override facility. Ideal for residential applications.

Features

- Flexible, compact and economic polycarbonate LED twin head floodlight suitable for residential applications
- Twin adjustable heads provide greater flexibility and coverage
- CCT selectable between 3000K, 4000K and 6000K
- Polycarbonate construction ideal for coastal applications
- PIR with 8hr manual override facility
- Max. 10m detection length

t: +44 (0)20 8874 2234 e: info@mr-resistor.co.uk **www.mr-resistor.co.uk**

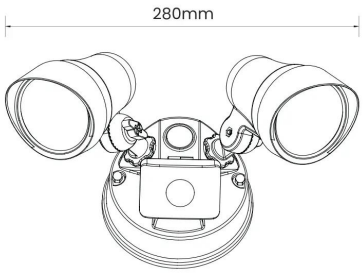



t: +44 (0)20 8874 2234 e: info@mr-resistor.co.uk **www.mr-resistor.co.uk**