

Casambi Bluetooth Mesh Drivers


Casambi LED Driver Bluetooth Mesh Control 2 Channel CCT Tunable White
150W 24V (Constant Voltage)



MR. RESISTOR®
Lighting Specialist Est. 1968



CASAMBI Bluetooth MESH

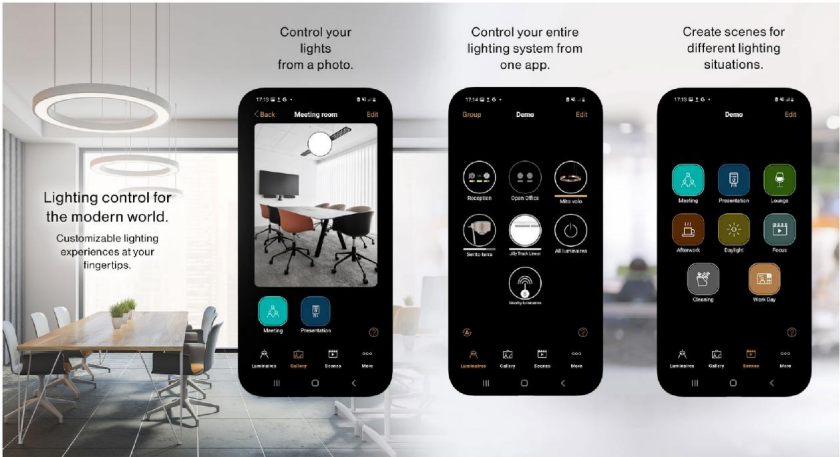

CASAMBI 2C24V150

150W 24V (Constant Voltage)
Quicklink: Q6D9C

General

Dimmable Yes
IP Rating IP66

Electrical

Maximum Wattage 150W
Voltage 24V

Casambi Drivers are the perfect solution for modern commercial lighting systems, offering advanced wireless control through Bluetooth and seamless integration with the Casambi ecosystem. Designed for use in offices, retail environments, hospitality venues, and other commercial spaces, these drivers combine high-performance LED power delivery with intuitive, app-based control.

Casambi is a Bluetooth Low Energy (BLE) based lighting control platform that allows wireless communication between lighting components—such as drivers, luminaires, sensors, and switches—without the need for additional wiring or central control systems.

- **App-Based Control:** The free Casambi app (iOS & Android) lets users control lighting with ease—adjust brightness, set scenes, schedule timers, and group fixtures.
- **Sensor Integration:** Supports motion and daylight sensors for automated, energy-efficient lighting.
- **No Gateway Required:** Devices communicate directly via Bluetooth, simplifying installation and reducing infrastructure costs.

Casambi uses Bluetooth mesh network, where all connected devices communicate with each other. Each device acts as a node that can send, receive, and relay signals, creating a fully distributed system with no single point of failure. This allows the system to grow effortlessly by adding more devices, ensures extended signal coverage as each unit strengthens the network, and delivers reliable performance by rerouting communication through other nodes if one device fails