


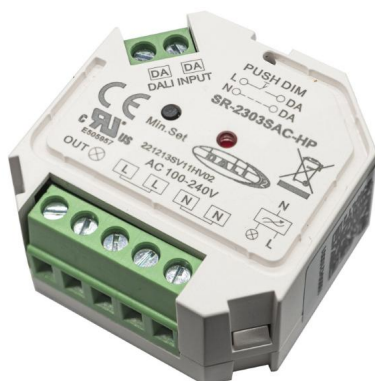

HTI SR2303SAC-HP

200W

Quicklink: Q4D8C

General

Colour	White
Construction	Plastic
Dimmable	Yes
IP Rating	IP20

Dimensions

Height	20.3mm
Length	45.5mm
Width	45mm

Electrical


Maximum Wattage	200W
-----------------	------

Product features:

- In compliance with IEC 62386-101:2014, IEC 62386-102:2014, IEC 62386-207 Ed2.
- Built-in DALI-2 interface, DALI DT6 device
- Match all DALI systems in the market
- AC phase cut dimmer with both DALI and push switch control interface
- 100-240VAC wide input and output voltage
- 1 DALI address to control 1 channel output, up to 400W
- Input and output with screw terminals, safe and reliable
- Trailing edge dimming, supports resistive loads and capacitive loads
- Innovative minimum brightness setting function
- Single wire push switch input for push dim function
- Great compatibility with universal 8V-230V~ input push switches
- To dim and switch single colour dimmable LED lamps, traditional incandescent and halogen lights
- Mini size, easy to be installed into a standard size wall box
- Waterproof grade: IP20


Safety & Warnings:

- DO NOT install with power applied to device
- DO NOT expose the device to moisture

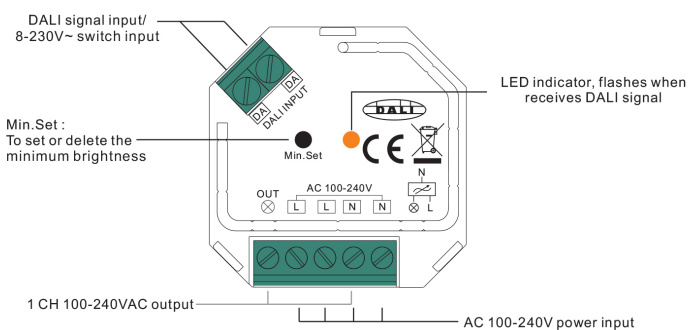


Wiring diagram

(1)With DALI Signal

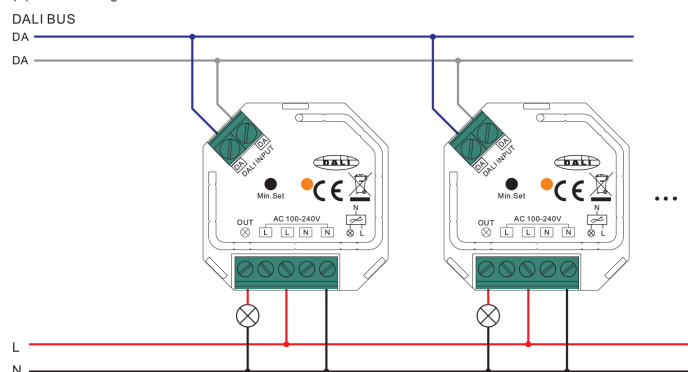

(2)With AC Push Switch

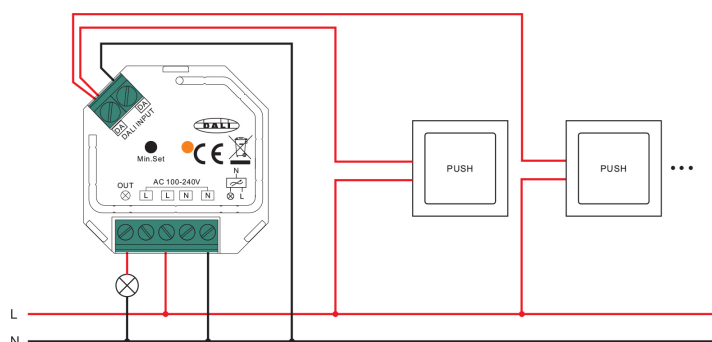

(3)With Push LV

