
Framing Spot Projector Track Lights

Framing Spotlight Projector 20° - 30° Zoom Lens CRI95 Dimmable LED

Track Light Three Circuit 10W 3000K Warm White White





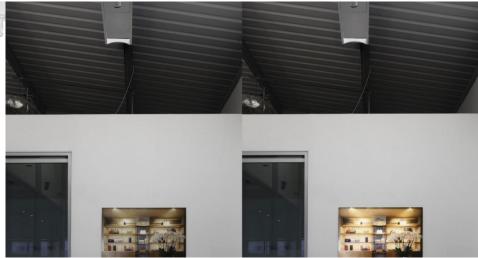

TK3FRAMESPOT WW

10W 3000K Warm White White Quicklink: Q6CCB

General

Colour White Dimmable Yes

Dimensions

Diameter 40mm
Horizontal Rotation 350°
Length 170mm
Vertical Rotation 90°

Electrical

Maximum Wattage 10W Voltage 240V

Light Characteristics

Beam Angle 20,30° Colour Rendering 95

Index

Colour Temperature 3000K Warm White

Lumens Per Watt 1121 lm 112 lm/W

Experience precision illumination with our innovative **Frame Spot**, designed for use with a 3 Circuit Track system. This advanced lighting fixture features adjustable optics and a zoom function, allowing you to control the intensity and focus of the light beam.

The TK3FRAME SPOT allows users to adjust four independent levers to define the size and shape of the light beam with precision. With adjustable framing shutters, manual focus, and a zoom lens, this fixture allows you to shape, sharpen, and size the light exactly as needed — all without tools. This allows you to control the shape of the light beam, creating square or rectangular illuminations perfect for highlighting artwork or exhibits

Zoom In / Zoom Out - Adjusting the Beam Size

Control how wide or narrow the light beam is.

- Gently rotate the first lens barrel to zoom between 20° 30°
- 1. Clockwise to zoom in (narrower beam)
- 2. Anti-clockwise to zoom out (wider beam)

Focus - Sharpening the Light Beam

Make the beam edges sharper or softer depending on the effect you want.

• Slowly rotate the second lens barrel back and forth to adjust the focus. Adjust until the edges of the beam appear clear and sharp.

Framing - Shaping the Light Beam

Cut and shape the light beam using four framing shutters to highlight only what you need.

- Locate the four framing levers on the projector.
- Slide each lever in or out to crop the beam from each side. Use one, two, or all four to create rectangles, squares, or custom shapes.
- To adjust the angle or rotation of the shape, rotate the entire lens assembly to match the orientation of your subject.

Designed for use with a 3 Circuit Track system and trailing edge dimmer only. This allows

Page 1 of 2

Framing Spot Projector Track Lights
Framing Spotlight Projector 20° - 30° Zoom Lens CRI95 Dimmable LED

Track Light Three Circuit 10W 3000K Warm White White



for easy installation and repositioning along the track, providing flexibility in lighting

